



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification<sup>6</sup> :

H04B 1/12, 7/005, G01S 7/28

A2

(11) International Publication Number:

WO 97/50186

(43) International Publication Date: 31 December 1997 (31.12.97)

(21) International Application Number: PCT/IL97/00209

(22) International Filing Date: 23 June 1997 (23.06.97)

(30) Priority Data:

08/672,899

27 June 1996 (27.06.96)

US

(71) Applicant: LAMAR SIGNAL PROCESSING LTD. [IL/IL];  
Cohav Yokneam, Yokneam Ilit, 31077 Haifa (IL).

(72) Inventor: MARASH, Joseph; Shimkin Street 1A, 34750 Haifa (IL).

(74) Agent: REINHOLD COHN AND PARTNERS; P.O. Box 4060,  
61040 Tel Aviv (IL).


(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

Without international search report and to be republished upon receipt of that report.

BEST AVAILABLE COPY

(54) Title: SYSTEM AND METHOD FOR ADAPTIVE INTERFERENCE CANCELLING

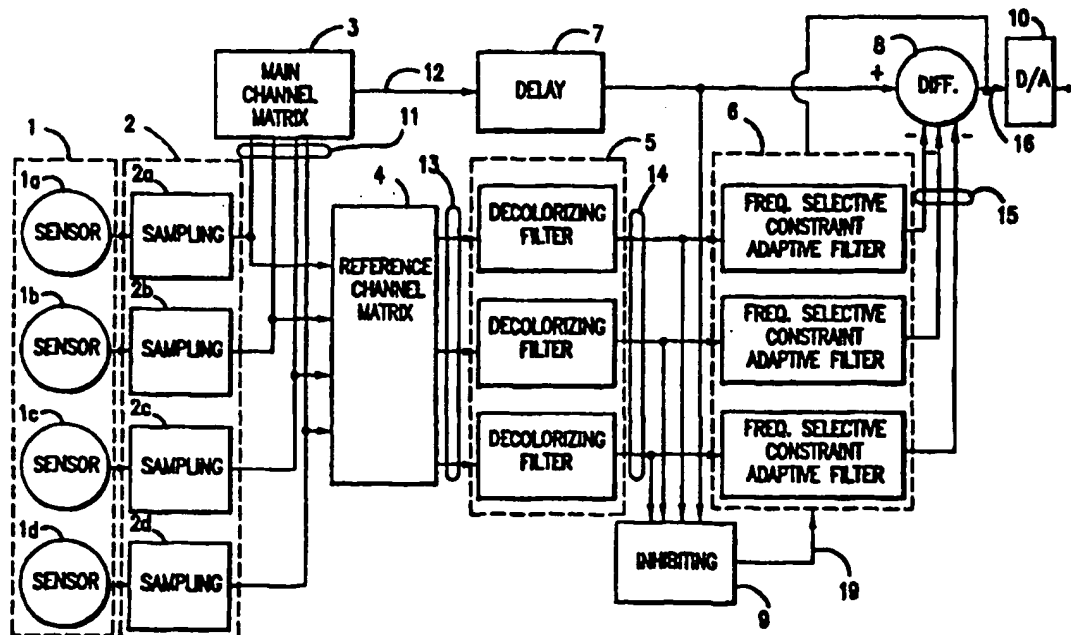

## (57) Abstract

An adaptive system and method for reducing interference in a signal received from an array of sensors. Adaptive filters are used to generate cancelling signals that closely approximate the interference present in the received signal. The adaptive filter weights are converted into the frequency domain where the frequency representation values in a selected frequency range are truncated to avoid signal leakage involving narrow band signals. Decolorizing filters are used to produce the cancelling signals having a flat frequency spectrum. Normalized power difference is used to limit the operation of the adaptive filters to the case where there is some directional interference to be eliminated.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**SYSTEM AND METHOD FOR ADAPTIVE INTERFERENCE CANCELLING****BACKGROUND OF THE INVENTION**

The present invention relates generally to signal processing, and more specifically to an adaptive signal  
5 processing system and method for reducing interference in a received signal.

There are many instances where it is desirable to have a sensor capable of receiving an information signal from a particular signal source where the environment includes  
10 sources of interference signals at locations different from that of the signal source. One such instance is the use of microphones to record a particular party's speech in a room where there are other parties speaking simultaneously, causing interference in the received signals.

15 If one knows the exact characteristics of the interference, one can use a fixed-weight filter to suppress it. But it is often difficult to predict the exact characteristics of the interference because they may vary according to changes in the interference sources, the  
20 background noise, acoustic environment, orientation of the sensor with respect to the signal source, the transmission paths from the signal source to the sensor, and many other factors. Therefore, in order to suppress such interference, an adaptive system that can change its own parameters in  
25 response to a changing environment is needed.

An adaptive filter is an adaptive system that can change its own filtering characteristics in order to produce a desired response. Typically, the filter weights defining the characteristics of an adaptive filter are continuously  
30 updated so that the difference between a signal representing a desired response and an output signal of the adaptive filter is minimized.

The use of adaptive filters for reducing interference in a received signal has been known in the art as adaptive noise  
35 cancelling. It is based on the idea of cancelling a noise component of a received signal from the direction of a signal source by sampling the noise independently of the source

signal and modifying the sampled noise to approximate the noise component in the received signal using an adaptive filter. For a seminal article on adaptive noise cancelling, see B. Widrow et al., Adaptive Noise Cancelling: Principles 5 and Applications, Proc. IEEE 63:1692-1716, 1975.

A basic configuration for adaptive noise cancelling has a primary input received by a microphone directed to a desired signal source and a reference input received independently by another microphone directed to a noise 10 source. The primary input contains both a source signal component originating from the signal source and a noise component originating from the noise source. The noise component is different from the reference input representing the noise source itself because the noise signal must travel 15 from the noise source to the signal source in order to be included as the noise component.

The noise component, however, is likely to have some correlation with the reference input because both of them originate from the same noise source. Thus, a filter can be 20 used to filter the reference input to generate a cancelling signal approximating the noise component. The adaptive filter does this dynamically by generating an output signal which is the difference between the primary input and the cancelling signal, and by adjusting its filter weights to 25 minimize the mean-square value of the output signal. When the filter weights settle, the output signal effectively replicates the source signal substantially free of the noise component because the cancelling signal closely tracks the noise component.

30 Adaptive noise cancelling can be combined with beamforming, a known technique of using an array of sensors to improve reception of signals coming from a specific direction. A beamformer is a spatial filter that generates a single channel from multiple channels received through 35 multiple sensors by filtering the individual multiple channels and combining them in such a way as to extract signals coming from a specific direction. Thus, a beamformer

can change the direction of receiving sensitivity without physically moving the array of sensors. For details on beamforming, see B.D. Van Veen and K.M. Buckley, Beamforming: A Versatile Approach to Spatial Filtering, IEEE ASSP Mag.

5 5(2), 4-24.

Since the beamformer can effectively be pointed in many directions without physically moving its sensors, the beamformer can be combined with adaptive noise cancelling to form an adaptive beamformer that can suppress specific  
10 directional interference rather than general background noise. The beamformer can provide the primary input by spatially filtering input signals from an array of sensors so that its output represents a signal received in the direction of a signal source. Similarly, the beamformer can provide  
15 the reference input by spatially filtering the sensor signals so that the output represents a signal received in the direction of interference sources. For a seminal article on adaptive beamformers, see L.J. Griffiths & C.W. Jim, An Alternative Approach to Linearly Constrained Adaptive  
20 Beamforming, IEEE Trans. Ant. Prop. AP-30:27-34, 1982.

One problem with a conventional adaptive beamformer is that its output characteristics change depending on input frequencies and sensor directions with respect to interference sources. This is due to the sensitivity of a  
25 beamformer to different input frequencies and sensor directions. A uniform output behavior of a system over all input frequencies of interest and over all sensor directions is clearly desirable in a directional microphone system where faithful reproduction of a sound signal is required  
30 regardless of where the microphones are located.

Another problem with adaptive beamforming is "signal leakage". Adaptive noise cancelling is based on an assumption that the reference input representing noise sources is uncorrelated with the source signal component in  
35 the primary input, meaning that the reference input should not contain the source signal. But this "signal free" reference input assumption is violated in any real

environment. Any mismatch in the microphones (amplitude or phase) or their related analog front end, any reverberation caused by the surroundings or a mechanical structure, and even any mechanical coupling in the physical microphone structure will likely cause "signal leakage" from the signal source into the reference input. If there is any correlation between the reference input and the source signal component in the primary input, the adaptation process by the adaptive filter causes cancellation of the source signal component, resulting in distortion and degradation in performance.

It is also important to confine the adaptation process to the case where there is at least some directional interference to be eliminated. Since nondirectional noise, such as wind noise or vibration noise induced by the mechanical structure of the system, is typically uncorrelated with the noise component of the received signal, the adaptive filter cannot generate a cancelling signal approximating the noise component.

Prior art suggests inhibiting the adaptation process of an adaptive filter when the signal-to-noise ratio (SNR) is high based on the observation that a strong source signal tends to leak into the reference input. For example, U.S. Pat. No. 4,956,867 describes the use of cross-correlation between two sensors to inhibit the adaptation process when the SNR is high.

But the prior art approach fails to consider the effect of directional interference because the SNR-based approach considers only nondirectional noise. Since nondirectional noise is not correlated to the noise component of the received signal, the adaptation process searches in vain for new filter weights, which often results in cancelling the source signal component of the received signal.

The prior art approach also fails to consider signal leakage when the source signal is of a narrow bandwidth. In a directional microphone application, the source signal often contains a narrow band signal, such as speech signal, with its power spectral density concentrated in a narrow frequency

range. When signal leakage occurs due to a strong narrow band signal, the prior art approach may not inhibit the adaptation process because the overall signal strength of such narrow band signal may not high enough. The source  
5 signal component of the received signal is cancelled as a result, and if the source signal is a speech signal, degradation in speech intelligibility occurs.

Therefore, there exists a need for an adaptive system that can suppress directional interference in a received  
10 signal with a uniform frequency behavior over a wide angular distribution of interference sources.

#### SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to  
15 suppress interference in a received signal using an adaptive filter for processing inputs from an array of sensors.

Another object of the invention is to limit the adaptation process of such adaptive filter to the case where there is at least some directional interference to be  
20 eliminated.

A further object of the invention is to control the adaptation process to prevent signal leakage for narrow band signals.

Another object is to produce an output with a uniform  
25 frequency behavior in all directions from the sensor array.

These and other objects are achieved in accordance with the present invention, which uses a system for processing digital data representing signals received from an array of sensors. The system includes a main channel matrix unit for  
30 generating a main channel representing signals received in the direction of a signal source where the main channel has a source signal component and an interference signal component. The system includes a reference channel matrix unit for generating at least one reference channel where each  
35 reference channel represents signals received in directions other than that of the signal source. The system uses adaptive filters for generating cancelling signals

approximating the interference signal component of the main channel and a difference unit for generating a digital output signal by subtracting the cancelling signals from the main channel. Each adaptive filter has weight updating means for  
5 finding new filter weights based on the output signal. The system includes weight constraining means for truncating the new filter weight values to predetermined threshold values when each of the new filter weight value exceeds the corresponding threshold value.

- 10 The system may further include at least one decolorizing filter for generating a flat-frequency reference channel. The system may further include inhibiting means for estimating the power of the main channel and the power of the reference channels and for generating an inhibit signal to  
15 the weight updating means based on normalized power difference between the main channel and the reference channels.

The system produces an output substantially free of directional interference with a uniform frequency behavior in  
20 all directions from the system.

The objects are also achieved in accordance with the present invention using a method, which can readily be implemented in a program controlling a commercially available DSP processor.

25

#### BRIEF DESCRIPTION OF THE DRAWINGS

The objects, features and advantages of the present invention will be more readily apparent from the following detailed description of the invention in which:

- 30 FIG. 1 is a block diagram of an overall system;  
FIG. 2 is a block diagram of a sampling unit;  
FIG. 3 is a block diagram of an alternative embodiment of a sampling unit;  
FIG. 4 is a schematic depiction of tapped delay lines  
35 used in a main channel matrix and a reference matrix unit;  
FIG. 5 is a schematic depiction of a main channel matrix unit;



FIG. 6 is a schematic depiction of a reference channel matrix unit;

FIG. 7 is a schematic depiction of a decolorizing filter;

5        FIG. 8 is a schematic depiction of an inhibiting unit based on directional interference;

FIG. 9 is a schematic depiction of a frequency-selective constraint adaptive filter;

FIG. 10 is a block diagram of a frequency-selective  
10 weight-constraint unit;

FIG. 11 is a flow chart depicting the operation of a program that can be used to implement the invention.

#### DETAILED DESCRIPTION OF THE INVENTION

15        FIG. 1 is a block diagram of a system in accordance with a preferred embodiment of the present invention. The system illustrated has a sensor array 1, a sampling unit 2, a main channel matrix unit 3, a reference channel matrix unit 4, a set of decolorizing filters 5, a set of frequency-selective  
20 constrained adaptive filters 6, a delay 7, a difference unit 8, an inhibiting unit 9, and an output D/A unit 10.

Sensor array 1, having individual sensors 1a-1d, receives signals from a signal source on-axis from the system and from interference sources located off-axis from the  
25 system. The sensor array is connected to sampling unit 2 for sampling the received signals, having individual sampling elements, 2a-2d, where each element is connected to the corresponding individual sensor to produce digital signals 11.

30        The outputs of sampling unit 2 are connected to main channel matrix unit 3 producing a main channel 12 representing signals received in the direction of a source. The main channel contains both a source signal component and an interference signal component.

35        The outputs of sampling unit 2 are also connected reference channel matrix unit 4, which generates reference channels 13 representing signals received from directions

other than that of the signal source. Thus, the reference channels represent interference signals.

The reference channels are filtered through decolorizing filters 5, which generate flat-frequency reference channels 14 having a frequency spectrum whose magnitude is substantially flat over a frequency range of interest. Flat-frequency reference channels 14 are fed into the set of frequency-selective constraint adaptive filters 6, which generate cancelling signals 15.

10 In the mean time, main channel 12 is delayed through delay 7 so that it is synchronized with cancelling signals 15. Difference unit 8 then subtracts cancelling signals 15 from the delayed main channel to generate a digital output signal 16, which is converted by D/A unit 10 into analog 15 form. Digital output signal 15 is fed back to the adaptive filters to update the filter weights of the adaptive filters.

Flat-frequency reference channels 14 are fed to inhibiting unit 9, which estimates the power of each flat-frequency reference channel as well as the power of the main 20 channel and generates an inhibit signal 19 to prevent signal leakage.

FIG. 2 depicts a preferred embodiment of the sampling unit. A sensor array 21, having sensor elements 21a-21d, is connected to an analog front end 22, having amplifier 25 elements 22a-22d, where each amplifier element is connected to the output of the corresponding sensor element. In a directional microphone application, each sensor can be either a directional or omnidirectional microphone. The analog front end amplifies the received analog sensor signals to 30 match the input requirement of the sampling elements. The outputs from the analog front ends are connected to a set of delta-sigma A/D converters, 23, where each converter samples and digitizes the amplified analog signals. The delta-sigma sampling is a well-known A/D technique using both 35 oversampling and digital filtering. For details on delta-sigma A/D sampling, see Crystal Semiconductor Corporation, Application Note: Delta-Sigma Techniques, 1989.

FIG. 3 shows an alternative embodiment of the sampling unit. A sensor array 31, having sensor elements 31a-31d, is connected to an amplifier 32, having amplifier elements 32a-32d, where each amplifier element amplifies the received signals from the corresponding sensor element. The outputs of the amplifier are connected to a sample & hold (S/H) unit 33 having sample & hold elements 33a-33d, where each S/H element samples the amplified analog signal from the corresponding amplifier element to produce a discrete signal. The outputs from the S/H unit are multiplexed into a single signal through a multiplexor 34. The output of the multiplexor is connected to a conventional A/D converter 35 to produce a digital signal.

FIG. 4 is a schematic depiction of tapped delay lines used in the main channel matrix unit and the reference channel matrix in accordance with a preferred embodiment of the present invention. The tapped delay line used here is defined as a nonrecursive digital filter, also known in the art as a transversal filter, a finite impulse response filter or an FIR filter. The illustrated embodiment has 4 tapped delay lines, 40a-40d. Each tapped delay line includes delay elements 41, multipliers 42 and adders 43. Digital signals, 44a-44d, are fed into the set of tapped delay lines 40a-40d. Delayed signals through delay elements 41 are multiplied by filter coefficients,  $F_{i,j}$ , 45 and added to produce outputs, 46a-46d.

The n-th sample of an output from the i-th tapped delay line,  $Y_i(n)$ , can then be expressed as:

$$Y_i(n) = \sum_{j=0}^k F_{i,j} X_i(n-j),$$
 where k is the length of the filter, and  $X_i(n)$  is the n-th sample of an input to the i-th tapped delay line.

FIG. 5 depicts the main channel matrix unit for generating a main channel in accordance with a preferred embodiment of the present invention. The unit has tapped delay lines, 50a-50d, as an input section taking inputs 51a-51d from the sampling unit. Its output section includes multipliers, 52a-52d, where each multiplier is connected to

the corresponding tapped delay line and an adder 53, which sums all output signals from the multipliers. The unit generates a main channel 54, as a weighted sum of outputs from all multipliers. The filter weights 55a-55d can be any  
5 combination of fractions as long as their sum is 1. For example, if 4 microphones are used, the embodiment may use the filter weights of 1/4 in order to take into account of the contribution of each microphone.

The unit acts as a beamformer, a spatial filter which  
10 filters a signal coming in all directions to produce a signal coming in a specific direction without physically moving the sensor array. The coefficients of the tapped delay lines and the filter weights are set in such a way that the received signals are spatially filtered to maximize the sensitivity  
15 toward the signal source.

Since some interference signals find their way to reach the signal source due to many factors such as the reverberation of a room, main channel 54 representing the received signal in the direction of the signal source  
20 contains not only a source signal component, but also an interference signal component.

FIG. 6 depicts the reference channel matrix unit for generating reference matrix channels in accordance with a preferred embodiment of the present invention. It has tapped  
25 delay lines, 60a-60d, as an input section taking inputs 61a-61d from the sampling unit. The same tapped delay lines as that of FIG. 4 may be used, in which case the tapped delay lines may be shared by the main and reference channel matrix units.

30 Its output section includes multipliers, 62a-62d, 63a-63d, 64a-64d and adders 65a-65c, where each multiplier is connected to the corresponding tapped delay line and adder. The unit acts as a beamformer which generates the reference channels 66a-66c representing signals arriving off-axis from  
35 the signal source by obtaining the weighted differences of certain combinations of outputs from the tapped delay lines. The filter weight combinations can be any numbers as long as

their sum of filter weights for combining a given reference channel is 0. For example, the illustrated embodiment may use a filter weight combination,  $(W_{11}, W_{12}, W_{13}, W_{14}) = (0.25, 0.25, 0.25, -0.75)$ , in order to combine signals 61a-5 61d to produce reference channel 66a.

The net effect is placing a null (low sensitivity) in the receiving gain of the beamformer toward the signal source. As a result, the reference channels represent interference signals in directions other than that of the 10 signal source. In other words, the unit "steers" the input digital data to obtain interference signals without physically moving the sensor array.

FIG. 7 is a schematic depiction of the decolorizing filter in accordance with a preferred embodiment of the 15 present invention. It is a tapped delay line including delay elements 71, multipliers 72 and adders 73. A reference channel 74 is fed into the tapped delay line. Delayed signals are multiplied by filter coefficients,  $F_i$ , 75 and added to produce an output 76. The filter coefficients are 20 set in such a way that the filter amplifies the low-magnitude frequency components of an input signal to obtain an output signal having a substantially flat frequency spectrum.

As mentioned before in the background section, the output of a conventional adaptive beamformer suffers a non- 25 uniform frequency behavior. This is because the reference channels do not have a flat frequency spectrum. The receiving sensitivity of a beamformer toward a particular angular direction is often described in terms of a gain curve. As mentioned before, the reference channel is 30 obtained by placing a null in the gain curve (making the sensor array insensitive) in the direction of the signal source. The resulting gain curve has a lower gain for lower frequency signals than higher frequency signals. Since the reference channel is modified to generate a cancelling 35 signal, a non-flat frequency spectrum of the reference channel is translated to a non-uniform frequency behavior in the system output.

The decolorizing filter is a fixed-coefficient filter which flattens the frequency spectrum of the reference channel (thus "decolorizing" the reference channel) by boosting the low frequency portion of the reference channel.

5 By adding the decolorizing filters to all outputs of the reference channel matrix unit, a substantially flat frequency response in all directions is obtained.

The decolorizing filter in the illustrated embodiment uses a tapped delay line filter which is the same as a finite  
10 impulse response (FIR) filter, but other kinds of filters such as an infinite impulse response (IIR) filter can also be used for the decolorizing filter in an alternative embodiment.

FIG. 8 depicts schematically the inhibiting unit in  
15 accordance with a preferred embodiment of the present invention. It includes power estimation units 81, 82 which estimate the power of a main channel 83 and each reference channel 84, respectively. A sample power estimation unit 85 calculates the power of each sample. A multiplier 86  
20 multiplies the power of each sample by a fraction,  $\alpha$ , which is the reciprocal of the number of samples for a given averaging period to obtain an average sample power 87. An adder 88 adds the average sample power to the output of another multiplier 89 which multiplies a previously  
25 calculated main channel power average 90 by  $(1-\alpha)$ . A new main channel power average is obtained by (new sample power)  $\times \alpha +$  (old power average)  $\times (1-\alpha)$ . For example, if a 100-sample average is used,  $\alpha = 0.01$ . The updated power average will be (new sample power)  $\times 0.01 +$  (old power average)  $\times$   
30 0.99. In this way, the updated power average will be available at each sampling instant rather than after an averaging period. Although the illustrated embodiment shows an on-the-fly estimation method of the power average, other kinds of power estimation methods can also be used in an  
35 alternative embodiment.

A multiplier 91 multiplies the main channel power 89 with a threshold 92 to obtain a normalized main channel power

average 93. An adder 94 subtracts reference channel power averages 95 from the normalized main channel power average 93 to produce a difference 96. If the difference is positive, a comparator 97 generates an inhibit signal 98. The inhibit  
5 signal is provided to the adaptive filters to stop the adaptation process to prevent signal leakage.

Although the illustrated embodiment normalizes the main channel power average, an alternative embodiment may normalize the reference channel power average instead of the  
10 main channel power average. For example, if the threshold 92 in the illustrated embodiment is 0.25, the same effect can be obtained in the alternative embodiment by normalizing each reference channel power average by multiplying it by 4.

This inhibition approach is different from the prior art  
15 SNR-based inhibition approach mentioned in the background section in that it detects the presence of significant directional interference which the prior art approach does not consider. As a result, the directional-interference-based inhibition approach stops the adaptation process when  
20 there is no significant directional interference to be eliminated, whereas the prior art approach does not.

For example, where there is a weak source signal (e.g. during speech intermission) and there is almost no directional interference except some uncorrelated noise (such  
25 as noise due to wind or mechanical vibrations on the sensor structure), the SNR-based approach would allow the adaptive filter to continue adapting due to the small SNR. The continued adaptation process is not desirable because there is very little directional interference to be eliminated in  
30 the first place, and the adaptation process searches in vain for new filter weights to eliminate the uncorrelated noise, which often results in cancelling the source signal component of the received signal.

By contrast, the directional-interference-based  
35 inhibition mechanism will inhibit the adaptation process in such a case because the strength of directional interference as reflected in the reference channel power average will be

smaller than the normalized main channel power average, producing a positive normalized power difference. The adaptive process is inhibited as a result until there is some directional interference to be eliminated.

5        FIG. 9 shows the frequency-selective constraint adaptive filter together with the difference unit in accordance with a preferred embodiment of the present invention. The frequency-selective constraint adaptive filter 101 includes a finite impulse response (FIR) filter 102, an LMS weight  
10 updating unit 103 and a frequency-selective weight-constraint unit 104. In an alternative embodiment, an infinite impulse response (IIR) filter can be used instead of the FIR filter.

A flat-frequency reference channel 105 passes through FIR filter 102 whose filter weights are adjusted to produce a  
15 cancelling signal 106 which closely approximates the actual interference signal component present in a main channel 107. In a preferred embodiment, the main channel is obtained from the main channel matrix unit after a delay in order to synchronize the main channel with the cancelling signal. In  
20 general, there is a delay between the main channel and the cancelling signal because the cancelling signal is obtained by processing reference channels through extra stages of delay, i.e., the decolorization filters and adaptive filters. In an alternative embodiment, the main channel directly from  
25 the main channel matrix unit may be used if the delay is not significant.

A difference unit 108 subtracts cancelling signal 106 from main channel 107 to generate an output signal 109. Adaptive filter 101 adjusts filter weights,  $W_1-W_n$ , to minimize  
30 the power of the output signal. When the filter weights settle, output signal 109 generates the source signal substantially free of the actual interference signal component because cancelling signal 106 closely tracks the interference signal component. Output signal 109 is sent to  
35 the output D/A unit to produce an analog output signal. Output signal 109 is also used to adjust the adaptive filter weights to further reduce the interference signal component.



There are many techniques to continuously update the values of the filter weights. The preferred embodiment uses the Least Mean-Square (LMS) algorithm which minimize the mean-square value of the difference between the main channel and the cancelling signal, but in an alternative embodiment, other algorithms such as Recursive Least Square (RLS) can also be used.

Under the LMS algorithm, the adaptive filter weights are updated according to the following:

10 
$$W_p(n+1) = W_p(n) + 2 \mu r(n-p) e(n)$$

where  $n$  is a discrete time index;  $W_p$  is a  $p$ -th filter weight of the adaptive filter;  $e(n)$  is a difference signal between the main channel signal and the cancelling signal;  $r(n)$  is a reference channel; and  $\mu$  is an adaptation constant that  
15 controls the speed of adaptation.

FIG. 10 depicts a preferred embodiment of the frequency-selective weight-constraint unit. The frequency-selective weight-control unit 110 includes a Fast Fourier Transform (FFT) unit 112, a set of frequency bins 114, a set of  
20 truncating units 115, a set of storage cells 116, and an Inverse Fast Fourier Transform (IFFT) unit 117, connected in series.

The FFT unit 112 receives adaptive filter weights 111 and performs the FFT of the filter weights 111 to obtain  
25 frequency representation values 113. The frequency representation values are then divided into a set of frequency bands and stored into the frequency bins 114a-114h. Each frequency bin stores the frequency representation values within a specific bandwidth assigned to each bin. The values  
30 represent the operation of the adaptive filter with respect to a specific frequency component of the source signal. Each of the truncating units 115a-115h compares the frequency representation values with a threshold assigned to each bin, and truncates the values if they exceeds the threshold. The  
35 truncated frequency representation values are temporarily stored in 116a-116h before the IFFT unit 117 converts them back to new filter weight values 118.

In addition to the inhibiting mechanism based on directional interference, the frequency-selective weight-constraint unit further controls the adaptation process based on the frequency spectrum of the received source signal.

- 5 Once the adaptive filter starts working, the performance change in the output of the filter, better or worse, becomes drastic. Uncontrolled adaptation can quickly lead to a drastic performance degradation.

- The weight-constraint mechanism is based on the  
10 observation that a large increase in the adaptive filter weight values hints signal leakage. If the adaptive filter works properly, there is no need for the filter to increase the filter weights to large values. But, if the filter is not working properly, the filter weights tend to grow to  
15 large values.

- One way to curve the growth is to use a simple truncating mechanism to truncate the values of filter weights to predetermined threshold values. In this way, even if the overall signal power may be high enough to trigger the  
20 inhibition mechanism, the weight-constraint mechanism can still prevent the signal leakage.

- For narrow band signals, such as a speech signal or a tonal signal, having their power spectral density concentrated in a narrow frequency range, signal leakage may  
25 not be manifested in a large growth of the filter weight values in the time domain. However, the filter weight values in the frequency domain will indicate some increase because they represent the operation of the adaptive filter in response to a specific frequency component of the source  
30 signal. The frequency-selective weight-constraint unit detects that condition by sensing a large increase in the frequency representation values of the filter weights. By truncating the frequency representation values in the narrow frequency band of interest and inverse-transforming them back  
35 to the time domain, the unit acts to prevent the signal leakage involving narrow band signals.

The system described herein may be implemented using commercially available digital signal processing (DSP) systems such as Analog Device 2100 series.

FIG. 11 shows a flow chart depicting the operation of a  
5 program for a DSP processor in accordance with a preferred embodiment of the present invention.

After the program starts at step 100, the program initializes registers and pointers as well as buffers (step 110). The program then waits for an interrupt from a  
10 sampling unit requesting for processing of samples received from the array of sensors (step 120). When the sampling unit sends an interrupt (step 131) that the samples are ready, the program reads the sample values (step 130) and stores the values (step 140). The program filters the stored values  
15 using a routine implementing a tapped delay line and stores the filtered input values (step 141).

The program then retrieves the filtered input values (step 151) and main channel matrix coefficients (step 152) to generate a main channel (step 150) by multiplying the two and  
20 to store the result (step 160).

The program retrieves the filtered input values (step 171) and reference channel matrix coefficients (step 172) to generate a reference channel (reference channel #1) by multiplying the two (step 170) and to store the result (step  
25 180). Steps 170 and 180 are repeated to generate all other reference channels (step 190).

The program retrieves one of the reference channels (step 201) and decolorization filter coefficients for the corresponding reference channel (step 202) to generate a  
30 flat-frequency reference channel by multiplying the two (step 200) and stores the result (step 210). Steps 200 and 210 are repeated for all other reference channels (step 220).

The program retrieves one of the flat-frequency reference channels (step 231) and adaptive filter  
35 coefficients (step 232) to generate cancelling signal (step 230) by multiplying the two and to store the result (step

240). Steps 230 and 240 are repeated for all other reference channels to generate more cancelling signals (step 250).

The program retrieves cancelling signals (steps 262-263) to subtract them from the main channel (retrieved at step 5 261) to cancel the interference signal component in the main channel (step 260). The output is send to a D/A unit to reproduce the signal without interference in analog form (step 264). The output is also stored (step 270).

The program calculates the power of a reference channel 10 sample (step 281) and retrieves an old reference channel power average (step 282). The program multiplies the sample power by  $\alpha$  and the old power average by  $(1-\alpha)$ , and sums them (step 280), and stores the result as a new power average (step 290). This process is repeated for all other reference 15 channels (step 300) and the total sum of power averages of all reference channels is stored (step 310).

The program multiplies the power of a main channel sample (retrieved at step 321) by  $\alpha$  and an old main channel power average (retrieved at step 322) by  $(1-\alpha)$ , sums them 20 (step 320) and stores them as a new main channel power average (step 330).

The program then multiplies the main channel power with a threshold to obtain a normalized main channel power average (step 340). The program subtracts the total reference 25 channel power average (retrieved at step 341) from the normalized main channel power average to produce a difference (step 350). If the difference is positive, the program goes back to step 120 where it simply waits for another samples.

If the difference is negative, the program enters a 30 weight-updating routine. The program calculates a new filter weight by adding  $[2 \times \text{adaptation constant} \times \text{reference channel sample (retrieved at step 361)} \times \text{output (retrieved at step 362)}]$  to an old filter weight (retrieved at step 363) to update the weight (step 360) and stores the result (step 35 370).

The program performs the FFT of the new filter weights to obtain their frequency representation (step 380). The

frequency representation values are divided into several frequency bands and stored into a set of frequency bins (step 390). The frequency representation values in each bin are compared with a threshold associated with each frequency bin 5 (step 400). If the values exceed the threshold, the values are truncated to the threshold (step 410). The program performs the IFFT to convert the truncated frequency representation values back to filter weight values (step 420) and stores them (step 430). The program repeats the weight- 10 updating routine, steps 360-430, for all other reference channels and associated adaptive filters (step 440). The program then goes back to step 120 to wait for an interrupt for a new round of processing samples (step 450).

15 While the invention has been described with reference to preferred embodiments, it is not limited to those embodiments. It will be appreciated by those of ordinary skill in the art that modifications can be made to the structure and form of the invention without departing from 20 its spirit and scope which is defined in the following claims.

25

30

35

**WHAT IS CLAIMED IS:**

1. An adaptive system for processing digital input data representing signals containing a source signal from a signal source on-axis relative to an array of sensors as well  
5 as interference signals from interference sources located off-axis from the signal source and for producing digital output data representing the source signal with reduced interference signals relative to the source signal, comprising:
  - 10 a main channel matrix unit for generating a main channel from the digital input data, the main channel representing signals received in the direction of the signal source and having a source signal component and an interference signal component;
  - 15 a reference channel matrix unit for generating at least one reference channel from the digital input data, each reference channel representing signals received in directions other than that of the signal source;  
at least one adaptive filter having adaptive filter  
20 weights, connected to receive signals from the reference channel matrix unit, for generating a cancelling signal approximating the interference signal component of the main channel;
  - a difference unit, connected to receive signals from the  
25 main channel matrix unit and said at least one adaptive filter, for generating the digital output data by subtracting the cancelling signal from the main channel;
  - said at least one adaptive filter also being connected to receive the digital output data and including weight  
30 updating means for finding new filter weight values of said at least one adaptive filter such that the difference between the main channel and the cancelling signal is minimized; and  
weight constraining means for truncating said new filter weight values to predetermined threshold values when each of  
35 the new filter weight values exceeds the corresponding threshold value.

2. The system of claim 1, further comprising at least one decolorizing filter for filtering said at least one reference channel so that it has a frequency spectrum whose magnitude is substantially flat over a predetermined  
5 frequency range.

3. The system of claim 1, further comprising inhibiting means, connected to receive signals from the main channel matrix unit and the reference channel matrix unit, for estimating the power of the main channel and the power of  
10 said at least one reference channel and for generating an inhibit signal to said weight updating means when a normalized power difference between the main channel and said at least one reference channel is positive.

4. The system of claim 1 wherein the sensors are  
15 microphones.

5. An adaptive system for processing digital input data representing signals containing a source signal from a signal source on-axis relative to an array of sensors as well  
20 as interference signals from interference sources located off-axis from the signal source and for producing digital output data representing the source signal with reduced interference signals relative to the source signal, comprising:

25 a main channel matrix unit for generating a main channel from the digital input data, the main channel representing signals received in the direction of the signal source and having a source signal component and an interference signal component;

30 a reference channel matrix unit for generating at least one reference channel from the digital input data, each reference channel representing signals received in directions other than that of the signal source;

at least one adaptive filter having adaptive filter  
35 weights, connected to receive signals from the reference channel matrix unit, for generating a cancelling signal

approximating the interference signal component of the main channel;

a difference unit, connected to receive signals from the main channel matrix unit and said at least one adaptive  
5 filter, for generating digital output data by subtracting the cancelling signal from the main channel;

said at least one adaptive filter also being connected to receive the digital output data and including weight updating means for finding new filter weight values of said  
10 at least one adaptive filter such that the difference between the main channel and the cancelling signal is minimized; and weight constraining means for converting the new filter weight values to frequency representation values, truncating the frequency representation values to predetermined  
15 threshold values, and converting them back to adaptive filter weights.

6. The system of claim 5, further comprising at least one decolorizing filter for filtering said at least one reference channel so that it has a frequency spectrum whose  
20 magnitude is substantially flat over a predetermined frequency range.

7. The system of claim 5, further comprising inhibiting means, connected to receive signals from the main channel matrix unit and the reference channel matrix unit,  
25 for estimating the power of the main channel and the power of said at least one reference channel and for generating an inhibit signal to said weight updating means when a normalized power difference between the main channel and said at least one reference channel is positive.

30 8. The system of claim 5 wherein the sensors are microphones.

9. An adaptive system for receiving a source signal from a signal source on-axis relative to the system as well  
35 as interference signals from interference sources located off-axis from the signal source and for producing an output



signal with reduced interference signals relative to the source signal, comprising:

a sensor array of spatially distributed sensors, each for receiving such source and interference signals;

5 a sampling unit, connected to receive signals from the sensor array, for converting such signals to digital form;

a main channel matrix unit, connected to receive signals from the sampling unit, for generating a main channel representing signals received in the direction of the signal  
10 source, the main channel having a source signal component and an interference signal component;

a reference channel matrix unit, connected to receive signals from the sampling unit, for generating at least one reference channel, each reference channel representing  
15 signals received in directions other than that of the signal source;

at least one adaptive filter having adaptive filter weights, connected to receive signals from the reference channel matrix unit, for generating a cancelling signal  
20 approximating the interference signal component of the main channel;

a difference unit, connected to receive signals from the main channel matrix unit and said at least one adaptive filter, for subtracting the cancelling signal from the main  
25 channel to generate a digital output signal;

an output digital-to-analog converter for converting said digital output signal to analog form;

said at least one adaptive filter also being connected to receive the digital output signal of the difference unit  
30 and including weight updating means for finding new filter weight values of said at least one adaptive filter such that the difference between the main channel and the cancelling signal is minimized; and

weight constraining means for truncating said new filter  
35 weight values to predetermined threshold values when each of the new filter weight value exceeds the corresponding threshold value.

10. The system of claim 9, further comprising at least one decolorizing filter for filtering said at least one reference channel so that it has a frequency spectrum whose magnitude is substantially flat over a predetermined  
5 frequency range.

11. The system of claim 9, further comprising inhibiting means, connected to receive signals from the main channel matrix unit and the reference channel matrix unit, for estimating the power of the main channel and the power of  
10 said at least one reference channel and for generating an inhibit signal to said weight updating means when a normalized power difference between the main channel and said at least one reference channel is positive.

12. The system of claim 9, further comprising delay  
15 means for delaying the main channel so that the main channel is synchronized with the cancelling signal before the difference unit subtracts the cancelling signal from the main channel.

13. The system of claim 9 wherein the sensors are  
20 microphones.

14. The system of claim 13 wherein the microphones are omnidirectional microphones.

15. The system of claim 13 wherein the microphones are unidirectional microphones.

25 16. The system of claim 9 wherein the main channel matrix unit includes beamforming means for spatially filtering signals from the sampling unit to exhibit the highest sensitivity toward the signal source.

17. The system of claim 9 wherein the reference channel  
30 matrix unit includes beamforming means for spatially filtering signals from the sampling unit to exhibit the lowest sensitivity toward the signal source.

18. The system of claim 9 wherein said at least one adaptive filter comprises a finite-impulse-response filter  
35 for generating the cancelling signal.

19. The system of claim 9 wherein said at least one adaptive filter comprises an infinite-impulse-response filter for generating the cancelling signal.

20. The system of claim 9 wherein the weight updating means uses the least-mean-square algorithm where the mean-square value of the difference between the main channel and the cancelling signal is minimized.

21. An adaptive system for receiving a source signal from a signal source on-axis relative to the system as well as interference signals from interference sources located off-axis from the signal source and for producing an output signal with reduced interference signals relative to the source signal, comprising:

15 a sensor array of spatially distributed sensors, each for receiving such source and interference signals;

a sampling unit, connected to receive signals from the sensor array, for converting such signals to digital form;

a main channel matrix unit, connected to receive signals from the sampling unit, for generating a main channel representing signals received in the direction of the signal source, the main channel having a source signal component and an interference signal component;

a reference channel matrix unit, connected to receive signals from the sampling unit, for generating at least one reference channel, each reference channel representing signals received in directions other than that of the signal source;

at least one adaptive filter having adaptive filter weights, connected to receive signals from the reference channel matrix unit, for generating a cancelling signal approximating the interference signal component of the main channel;

a difference unit, connected to receive signals from the main channel matrix unit and said at least one adaptive filter, for subtracting the cancelling signal from the main channel to generate a digital output signal;

an output digital-to-analog converter for converting the digital output signal to analog form;

said at least one adaptive filter also being connected to receive the digital output signal of the difference unit  
5 and including weight updating means for finding new filter weight values of said at least one adaptive filter such that the difference between the main channel and the cancelling signal is minimized; and

weight constraining means for constraining the operation  
10 of the adaptive filter by converting the new filter weight values to frequency representation values, truncating the frequency representation values to predetermined threshold values, and converting them back to adaptive filter weights.

22. The system of claim 21 wherein the weight  
15 constraining means comprises:

a Fast Fourier Transform unit for generating frequency representation values of the new filter weight values;

a set of frequency bins, each frequency bin for storing the frequency representation values for a frequency band  
20 assigned to each frequency bin;

a set of truncating means, each connected to the corresponding frequency bin, for truncating the frequency representation values stored in each frequency bin to a predetermined threshold value if the frequency representation  
25 values exceed the threshold value associated with each frequency bin; and

an Inverse Fast Fourier Transform unit, connected to the set of truncating means, for converting values from the set of truncating means back to adaptive filter weights.

30 23. The system of claim 21, further comprising at least one decolorizing filter for filtering said at least one reference channel so that it has a frequency spectrum whose magnitude is substantially flat over a predetermined frequency range.

35 24. The system of claim 21, further comprising inhibiting means, connected to receive signals from the main channel matrix unit and the reference channel matrix unit,

for estimating the power of the main channel and the power of said at least one reference channel and for generating an inhibit signal to said weight updating means when a normalized power difference between the main channel and said  
5 at least one reference channel is positive.

25. The system of claim 21 wherein the sensors are microphones.

26. The system of claim 21 wherein the main channel matrix unit includes beamforming means for spatially  
10 filtering signals from the sampling unit to exhibit the highest sensitivity toward the signal source.

27. The system of claim 21 wherein the reference channel matrix unit includes beamforming means for spatially filtering signals from the sampling unit to exhibit the  
15 lowest sensitivity toward the signal source.

28. The system of claim 21 wherein the weight updating means uses the least-mean-square algorithm where the mean-square value of the difference between the main channel and the cancelling signal is minimized.

20

29. A method for processing digital input data representing signals containing a source signal from a signal source on-axis from an array of sensors as well as interference signals from interference sources located off-  
25 axis from the signal source and for producing digital output data representing the source signal with reduced interference signals relative to the source signal, comprising the steps of:

generating a main channel from the digital input data,  
30 the main channel representing signals received in the direction of the signal source and having a source signal component and an interference signal component;

generating at least one reference channel from the digital input data, each reference channel representing  
35 signals received in directions other than that of the signal source;

filtering said at least one reference channel using filter weight values to generate a cancelling signal approximating the interference signal component in the main channel;

- 5        generating the digital output data by subtracting the cancelling signal from the main channel;

deriving new filter weight values so that the difference between the main channel and the cancelling signal is minimized; and

- 10       truncating the new filter weight values to predetermined threshold values when each of the new filter weight values exceeds the corresponding threshold value.

30. The method of claim 29, further comprising the step of filtering said at least one reference channel so that it  
15 has a substantially flat frequency spectrum.

31. The method of claim 29, further comprising the step of inhibiting the generation of the cancelling signal when a normalized power difference between the main channel and said at least one reference channel is positive.

20

32. A method for processing digital input data representing signals containing a source signal from a signal source on-axis from an array of sensors as well as interference signals from interference sources located off-  
25 axis from the signal source and for producing digital output data representing the source signal with reduced interference signals relative to the source signal, comprising the steps of:

generating a main channel from the digital input data,  
30 the main channel representing signals received in the direction of the signal source and having a source signal component and an interference signal component;

generating at least one reference channel from the digital input data, each reference channel representing  
35 signals received in directions other than that of the signal source;

filtering said at least one reference channel using filter weight values to generate a cancelling signal approximating the interference signal component in the main channel;

- 5       generating the digital output data by subtracting the cancelling signal from the main channel;

deriving new filter weight values so that the difference between the main channel and the cancelling signal is minimized; and

- 10       constraining the new filter weight values by converting the new filter weight values to frequency representation values, truncating the frequency representation values to predetermined threshold values, and converting them back to filter weight values.

- 15       33. The method of claim 32 wherein constraining the new filter weight values comprises:

generating frequency representation values of the new filter weight values;

- 20       divide the frequency representation values into a plurality of frequency bins;

truncating the frequency representation values in each frequency bin if they exceed a predetermined threshold value associated with each frequency bin; and

- 25       converting the frequency representation values back to filter weight values.

34. The method of claim 33 wherein generating the frequency representation is done by using the Fast Fourier Transform, and converting back is done by using the Inverse Fast Fourier Transform.

- 30       35. The method of claim 32, further comprising the step of filtering said at least one reference channel so that it has a substantially flat frequency spectrum.

36. The method of claim 32, further comprising the step of inhibiting the generation of the cancelling signal when a  
35       normalized power difference between the main channel and said at least one reference channel is positive.

37. A method for receiving a source signal from a signal source as well as interference signals from interference sources and for producing an output signal with reduced interference signals relative to the source signal, comprising the steps of:

receiving analog signals from a sensor array of spatially distributed sensors;

sampling the analog signals to convert them to digital form;

10 generating a main channel representing signals received in the direction of the signal source, the main channel having a source signal component and an interference signal component;

generating at least one reference channel, each  
15 reference channel representing signals received in directions other than that of the signal source;

filtering said at least one reference channel using filter weight values to generate a cancelling signal approximating the interference signal component in the main  
20 channel;

generating a digital output signal by subtracting the cancelling signal from the main channel;

converting the digital output signal to analog form;

deriving new filter weight values so that the difference  
25 between the main channel and the cancelling signal is minimized; and

truncating the new filter weight values to predetermined threshold values when each of the new filter weight values exceeds the corresponding threshold value.

30 38. The method of claim 37, further comprising the step of filtering said at least one reference channel so that it has a substantially flat frequency spectrum.

39. The method of claim 37, further comprising the step of inhibiting the generation of the cancelling signal when a  
35 normalized power difference between the main channel and said at least one reference channel is positive.



40. A method for receiving a source signal from a signal source as well as interference signals from interference sources and for producing an output signal with reduced interference signals relative to the source signal, comprising the steps of:

receiving analog signals from a sensor array of spatially distributed sensors;

sampling the analog signals to convert them to digital form;

10 generating a main channel representing signals received in the direction of the signal source, the main channel having a source signal component and an interference signal component;

generating at least one reference channel, each  
15 reference channel representing signals received in directions other than that of the signal source;

filtering said at least one reference channel using filter weight values to generate a cancelling signal approximating the interference signal component in the main  
20 channel;

generating a digital output signal by subtracting the cancelling signal from the main channel;

converting the digital output signal to analog form;

deriving new filter weight values so that the difference  
25 between the main channel and the cancelling signal is minimized; and

constraining the new filter weight values by converting the new filter weight values to frequency representation values, truncating the frequency representation values to  
30 predetermined threshold values, and converting them back to filter weight values.

41. The method of claim 40 wherein constraining the new filter weight values comprises:

generating frequency representation values of the new  
35 filter weight values;

divide the frequency representation values into a plurality of frequency bins;

truncating the frequency representation values in each frequency bin if they exceed a predetermined threshold value associated with each frequency bin; and

converting the frequency representation values back to  
5 filter weight values.

42. The method of claim 41 wherein generating frequency representation values is done by using the Fast Fourier Transform, and converting them back to filter weight values is done by using the Inverse Fast Fourier Transform.

10 43. The method of claim 40, further comprising the step of filtering said least one reference channel so that it has a substantially flat frequency spectrum.

44. The method of claim 40, further comprising the step of inhibiting the generation of the cancelling signal when a  
15 normalized power difference between the main channel and said at least one reference channel is positive.

20

25

30

35

1/15.

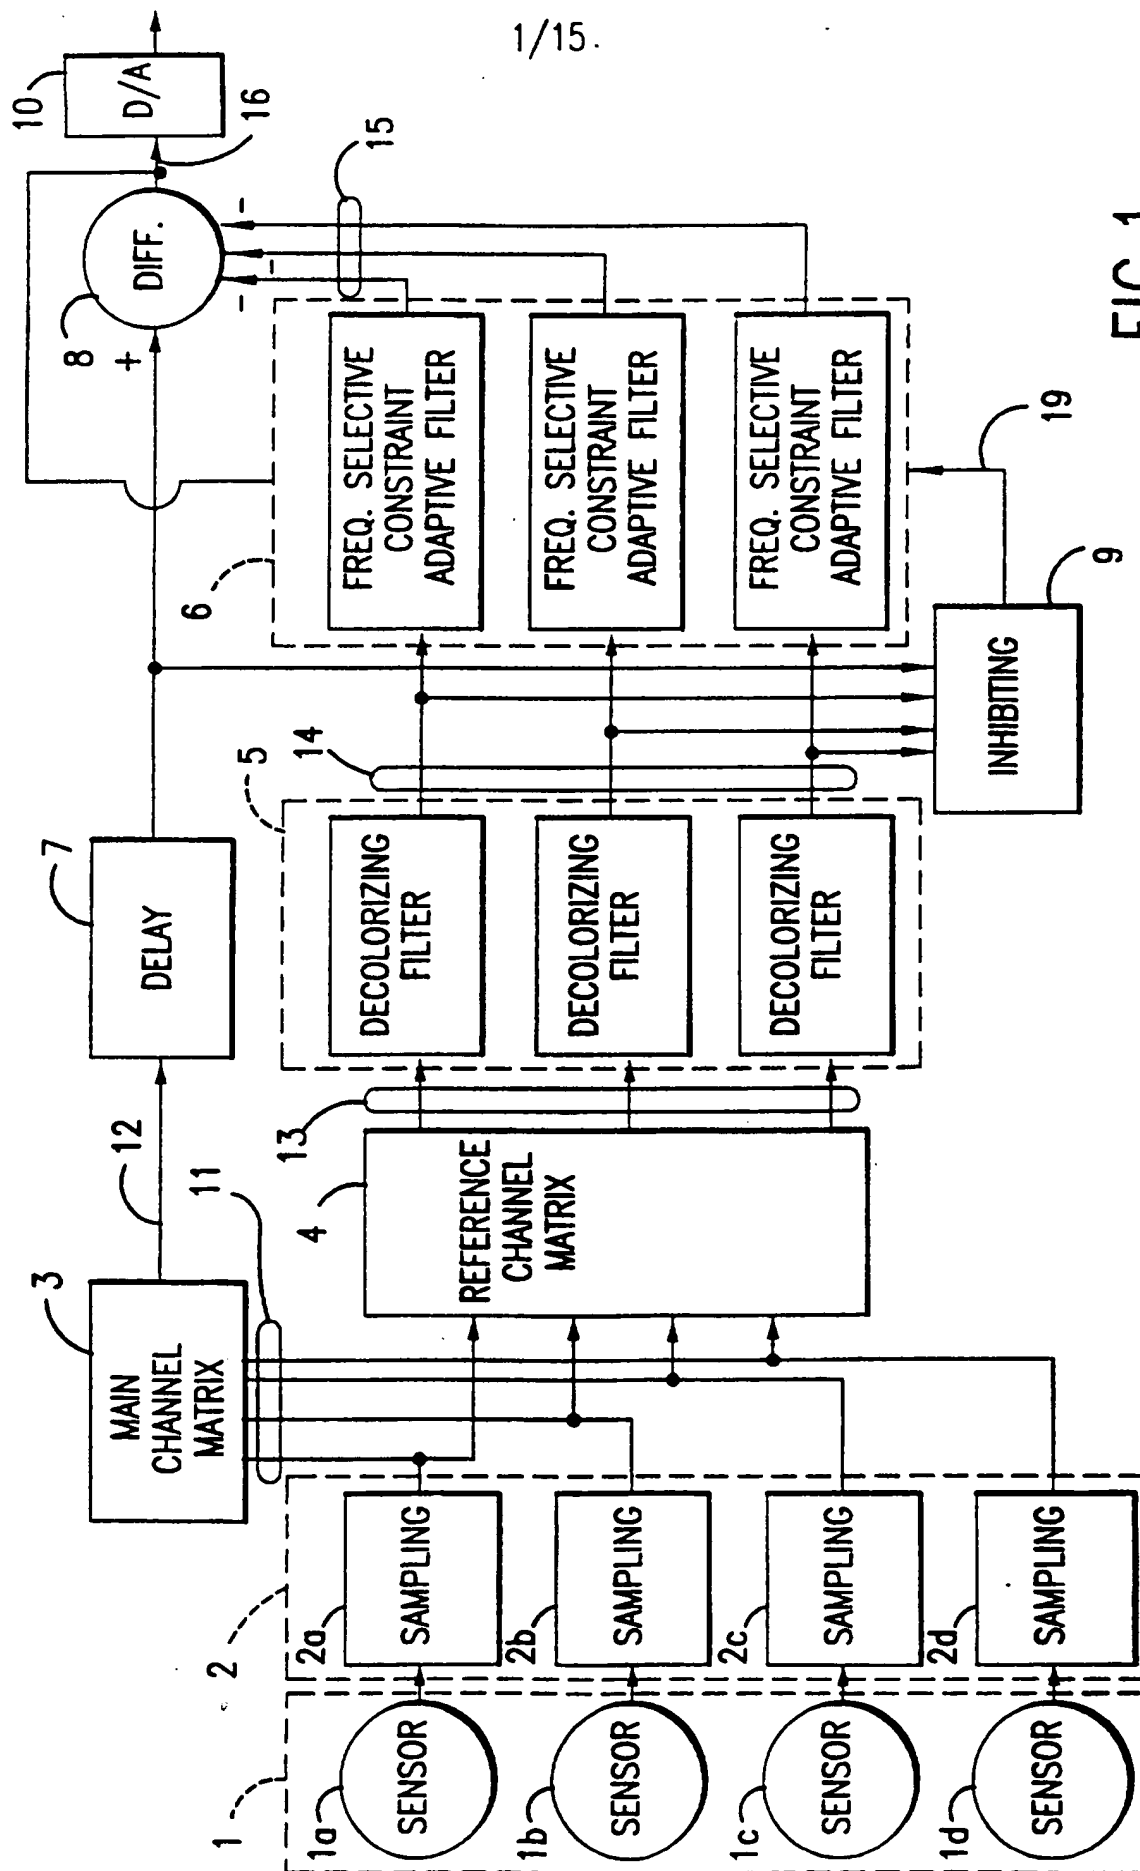


FIG.1

2/15

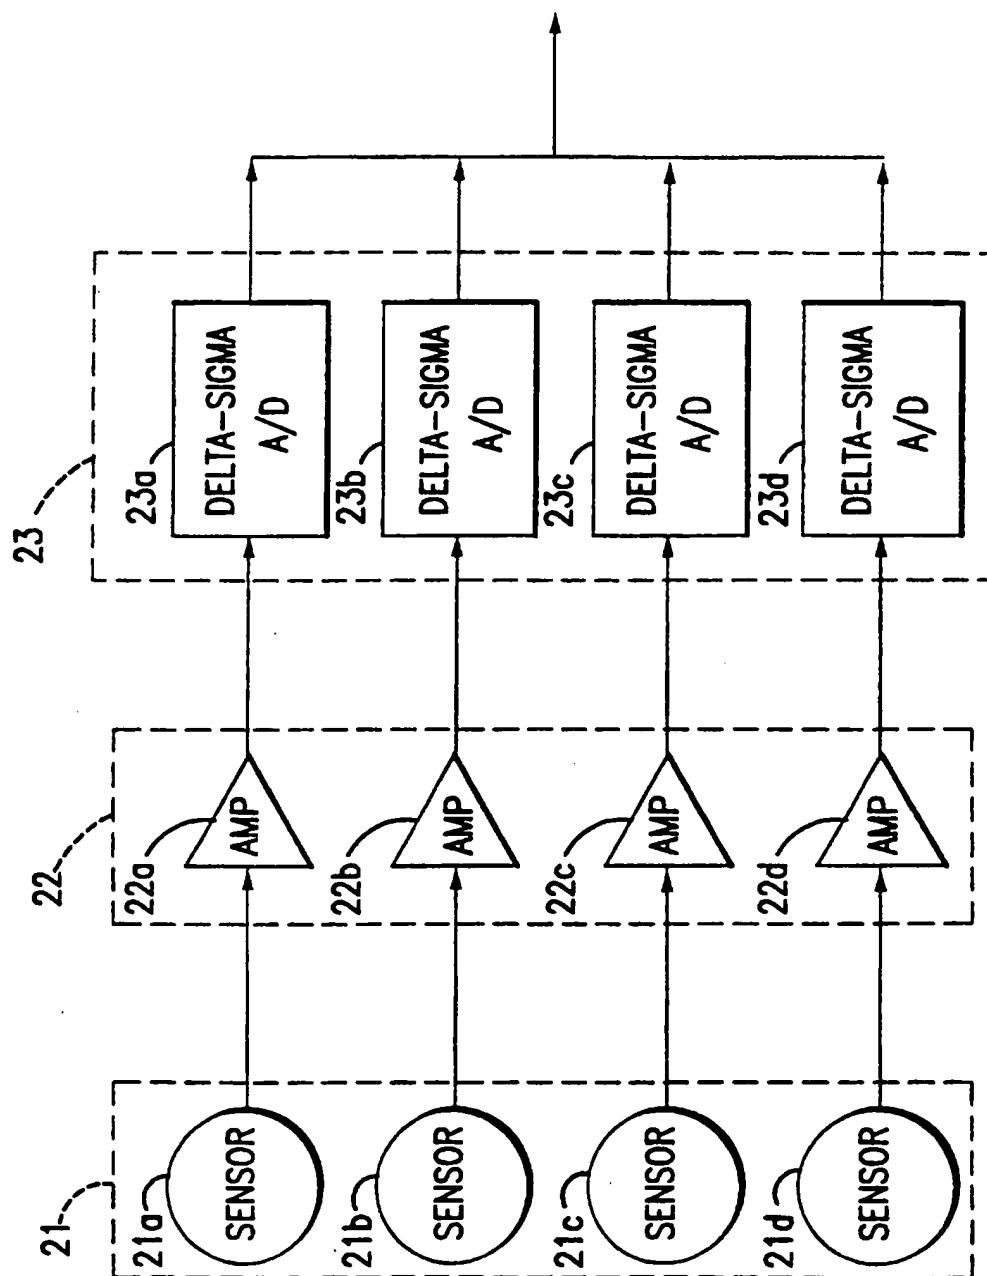


FIG. 2

3/15

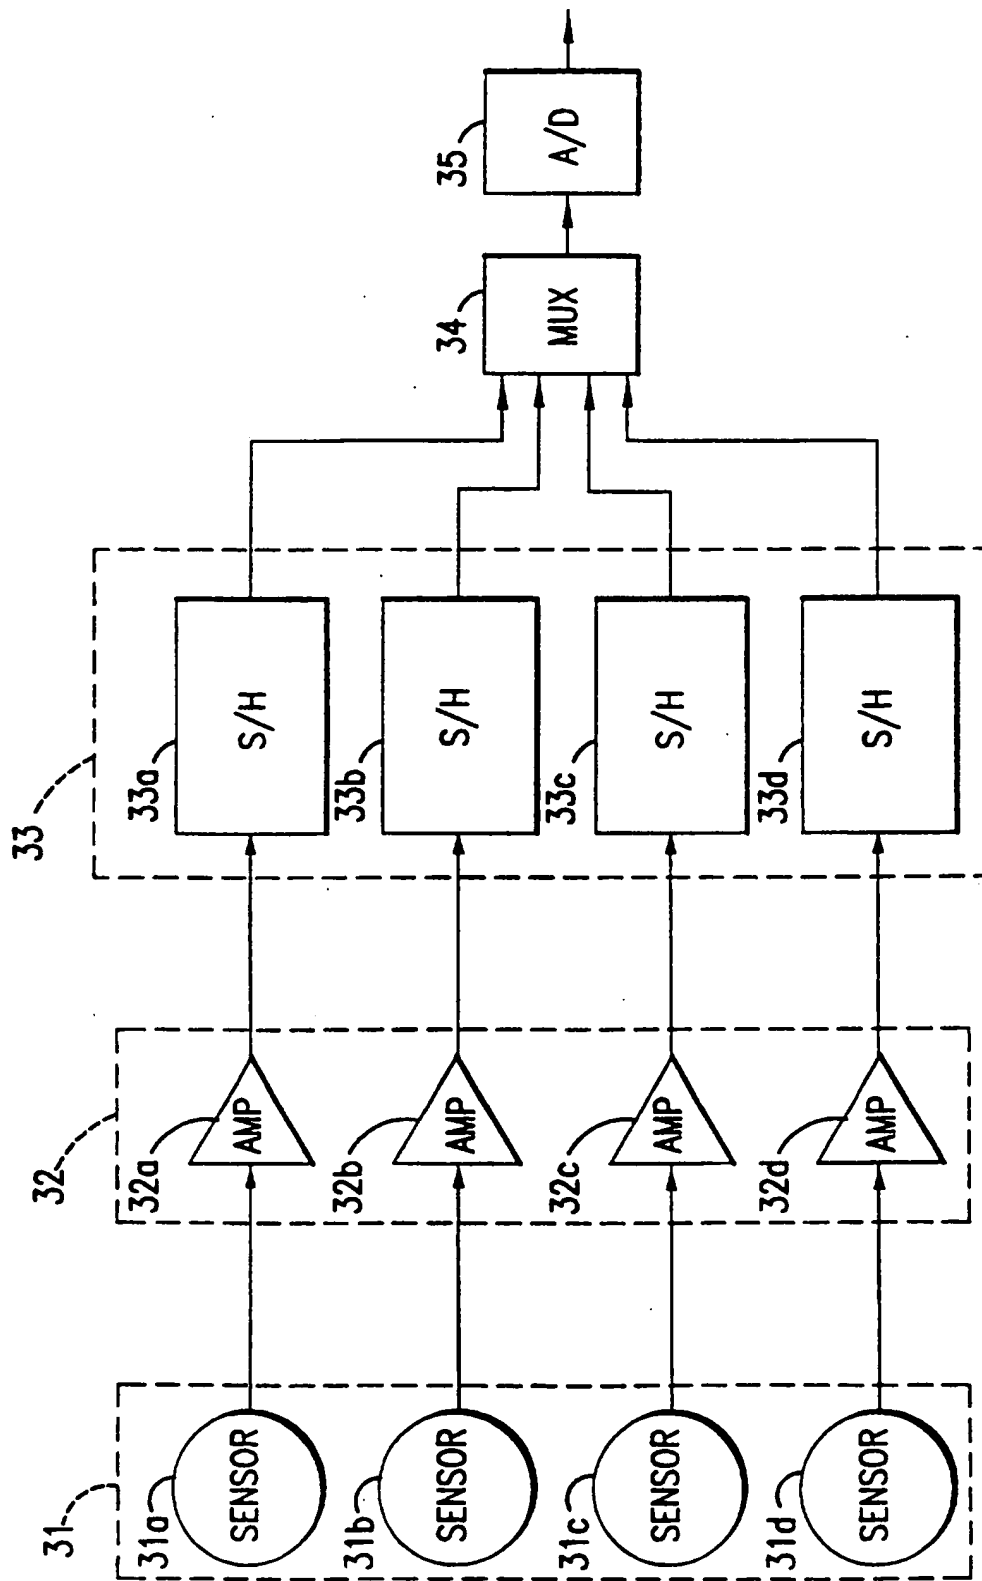


FIG. 3

4/15.

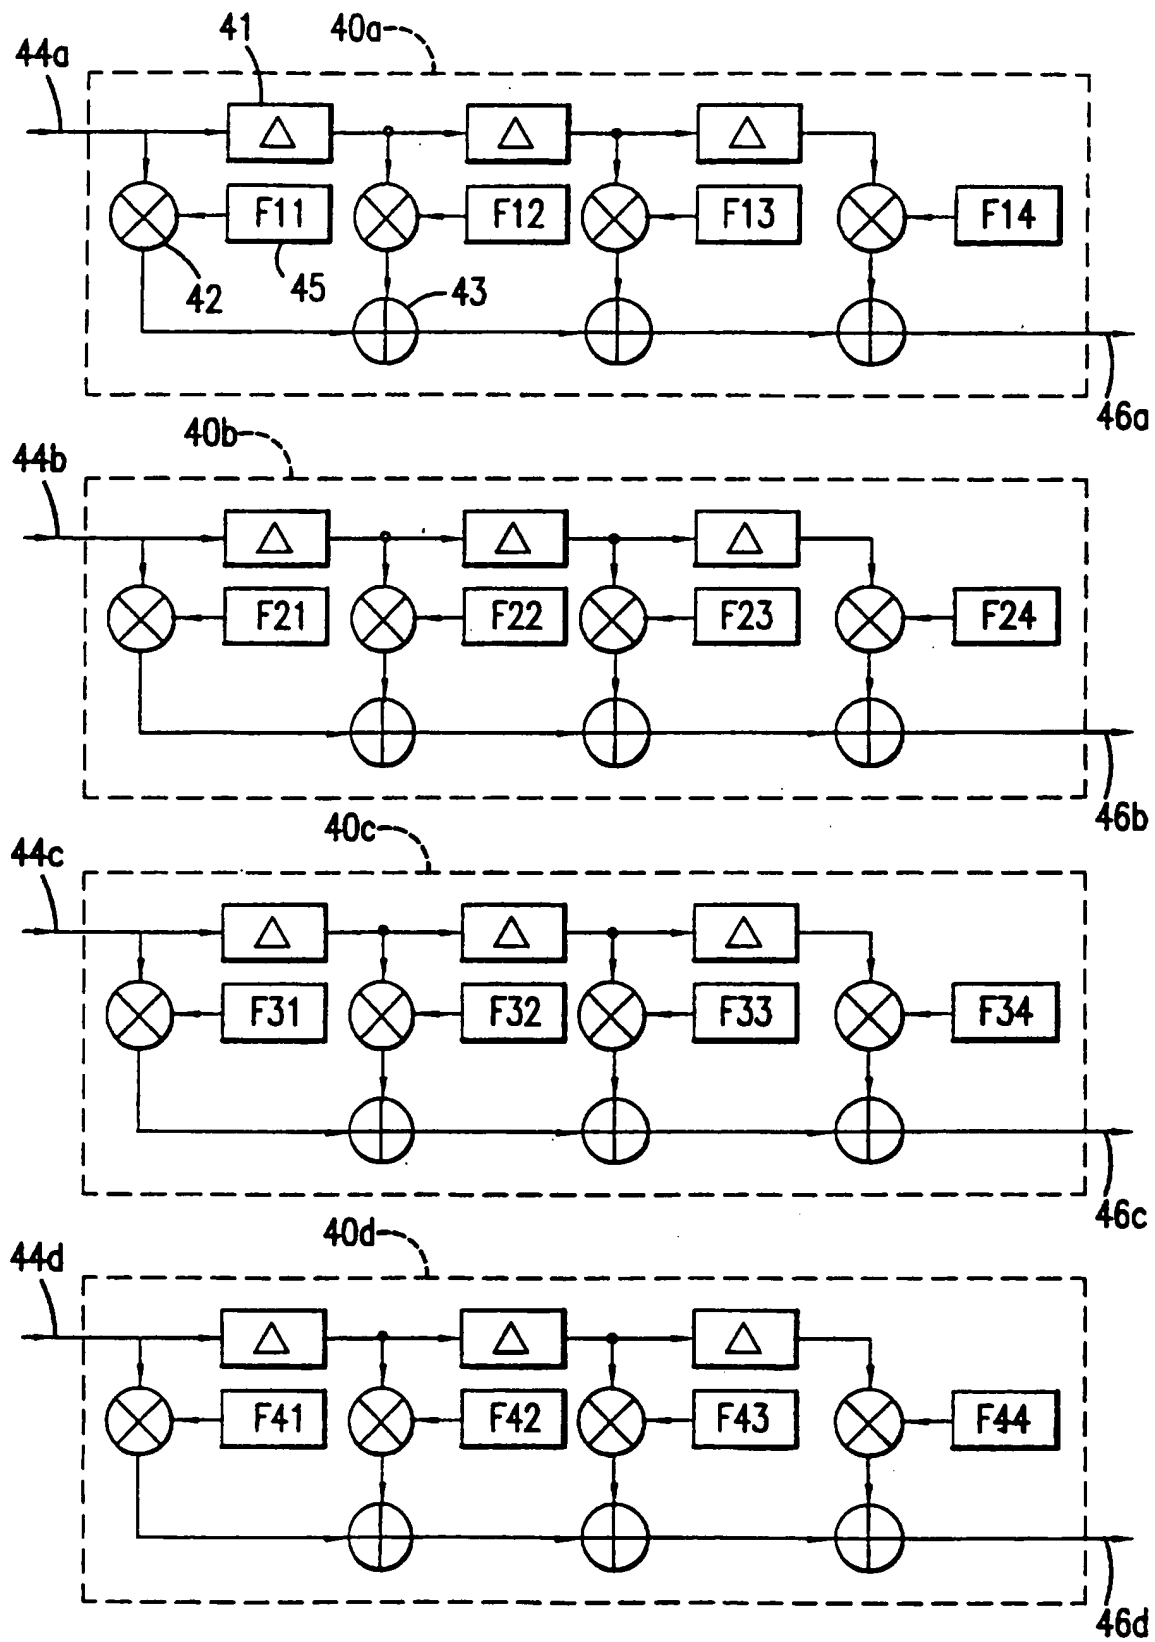


FIG. 4

5/15

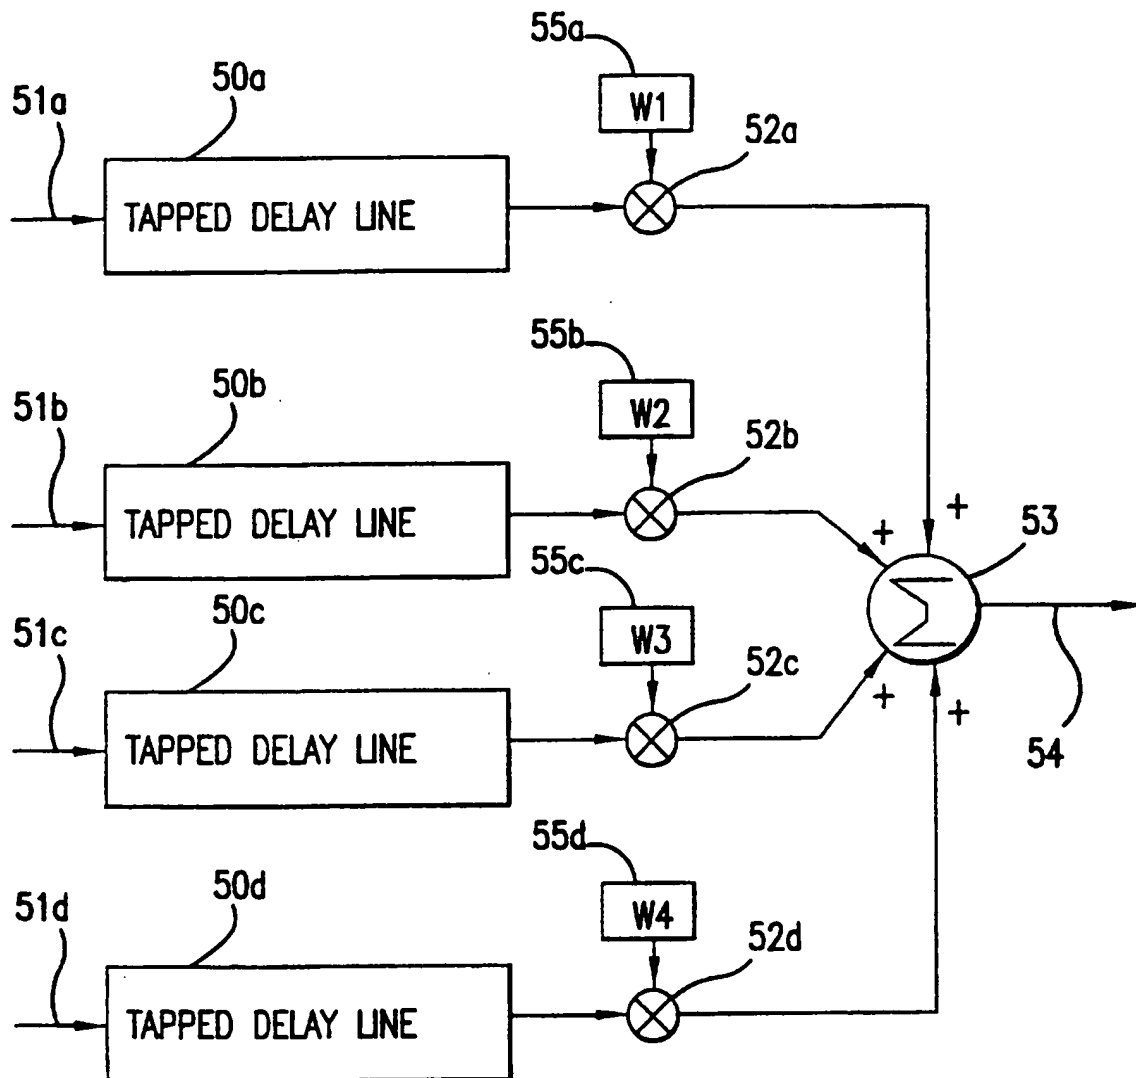


FIG.5

6/15

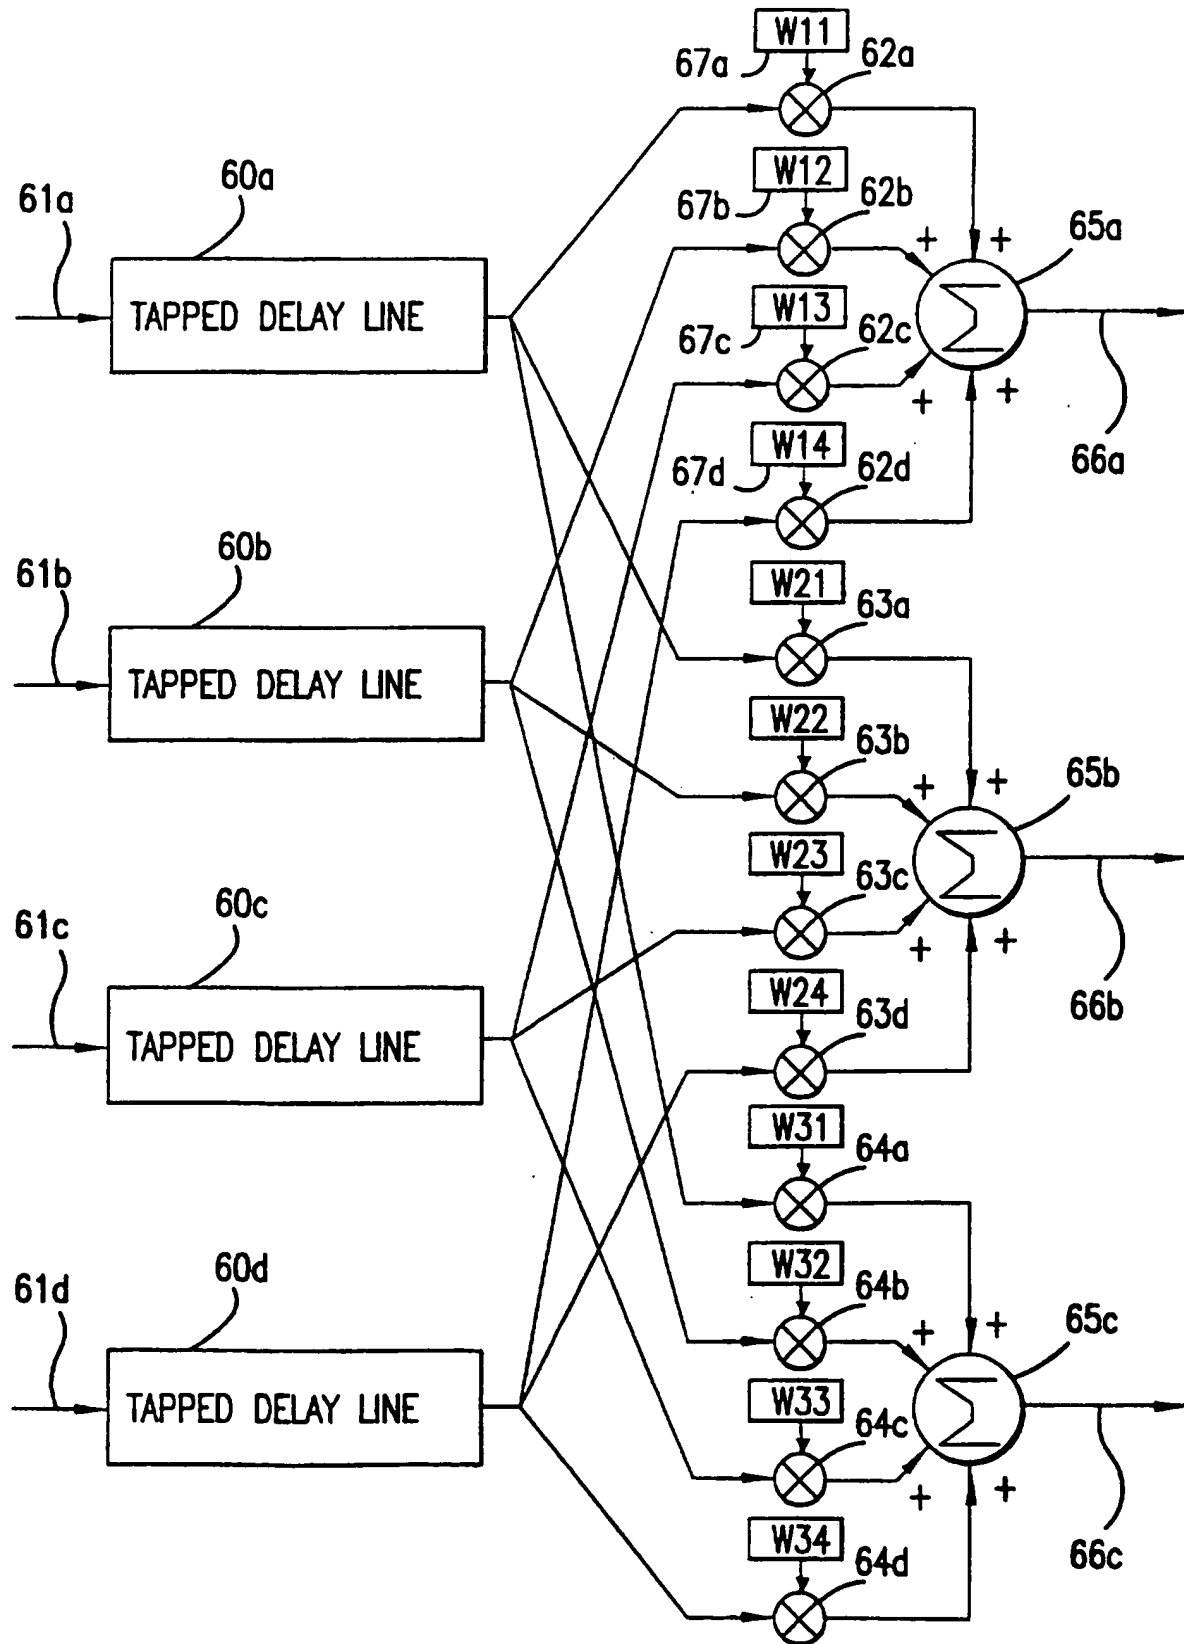


FIG. 6



7/15.

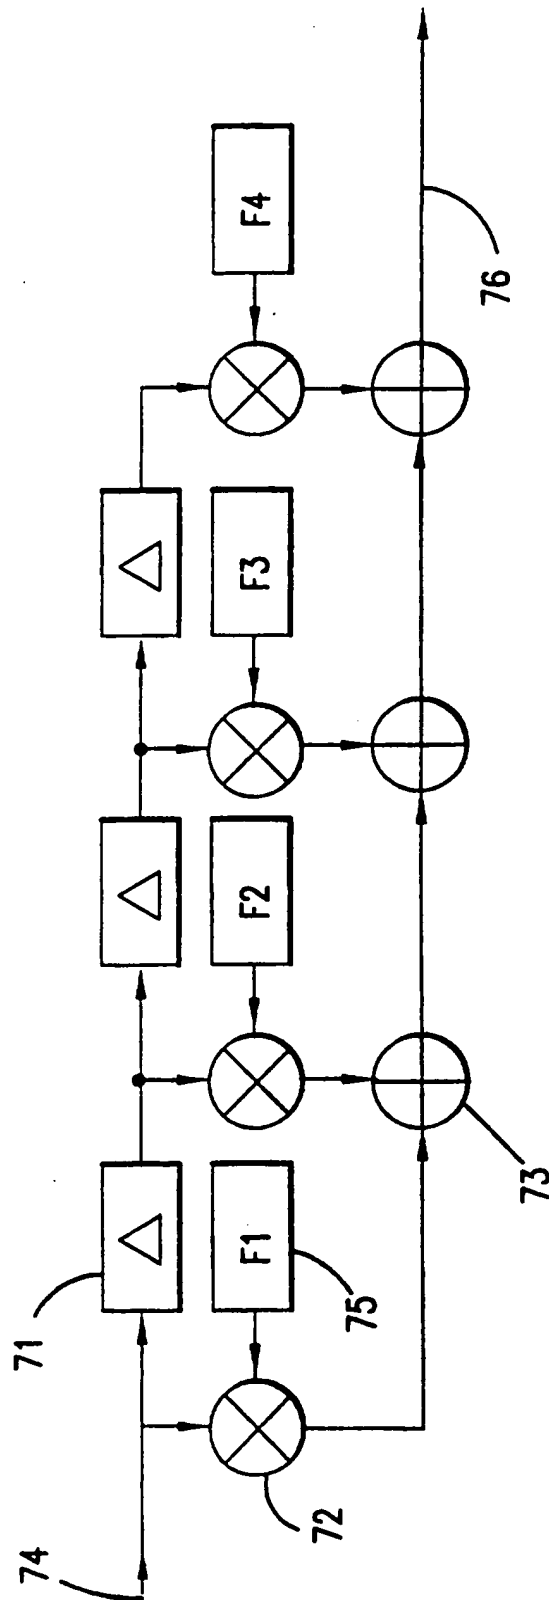


FIG.7

8/15.

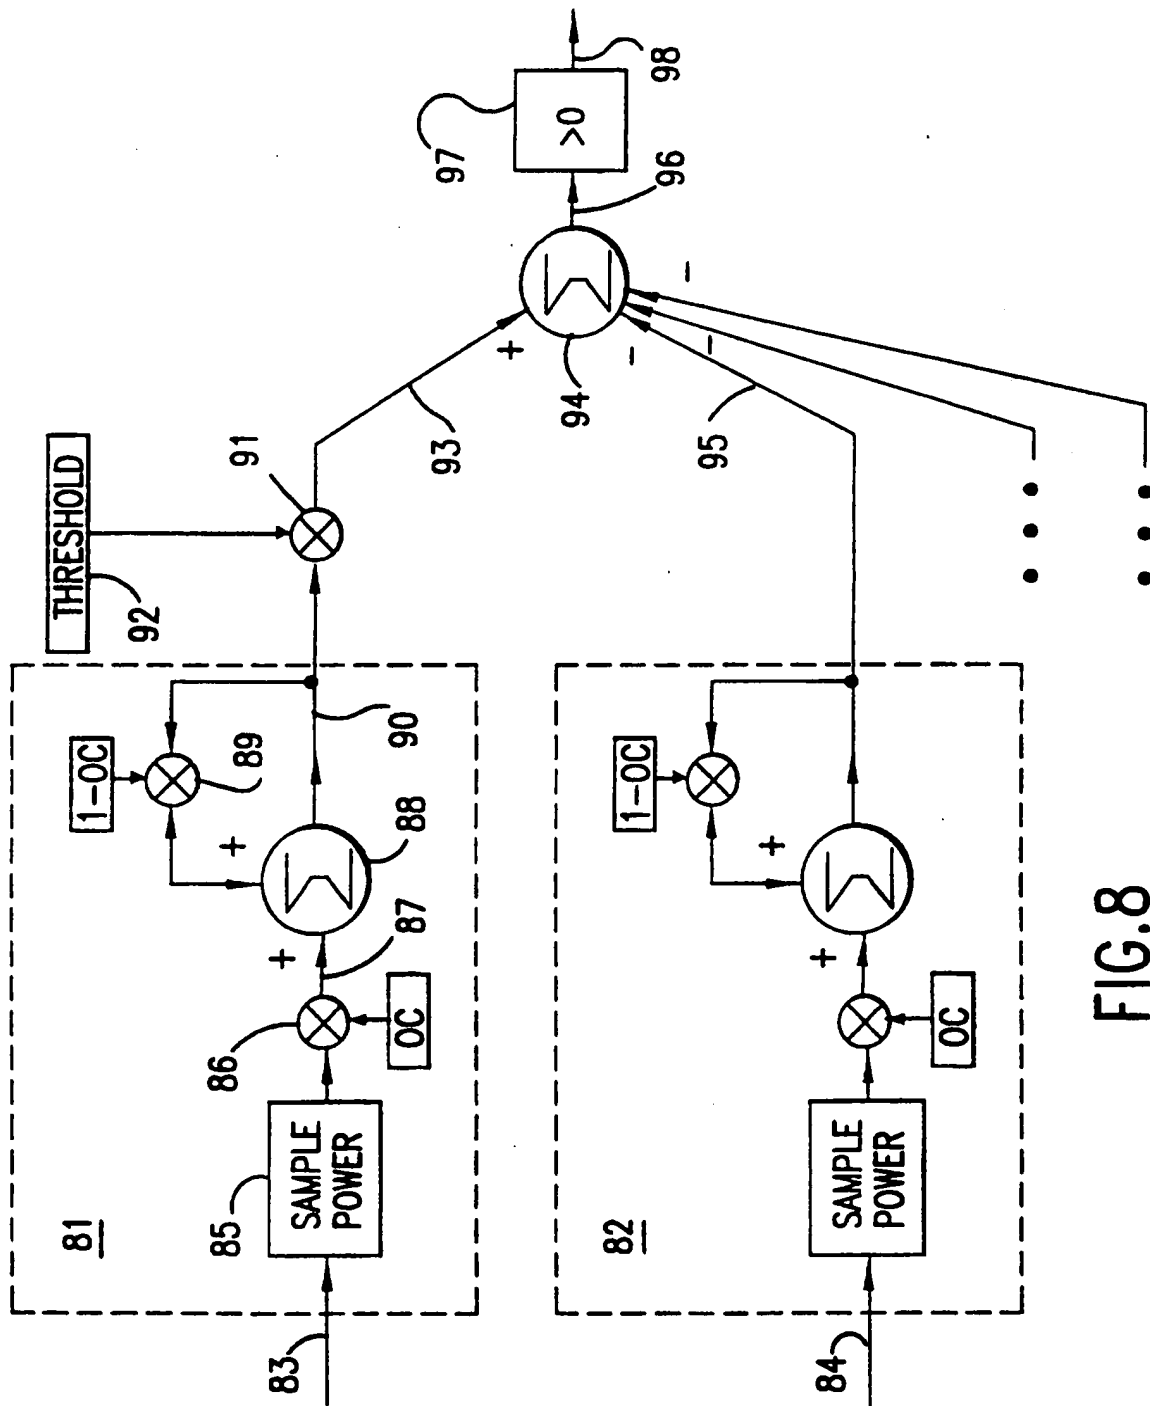


FIG.8

9/15.

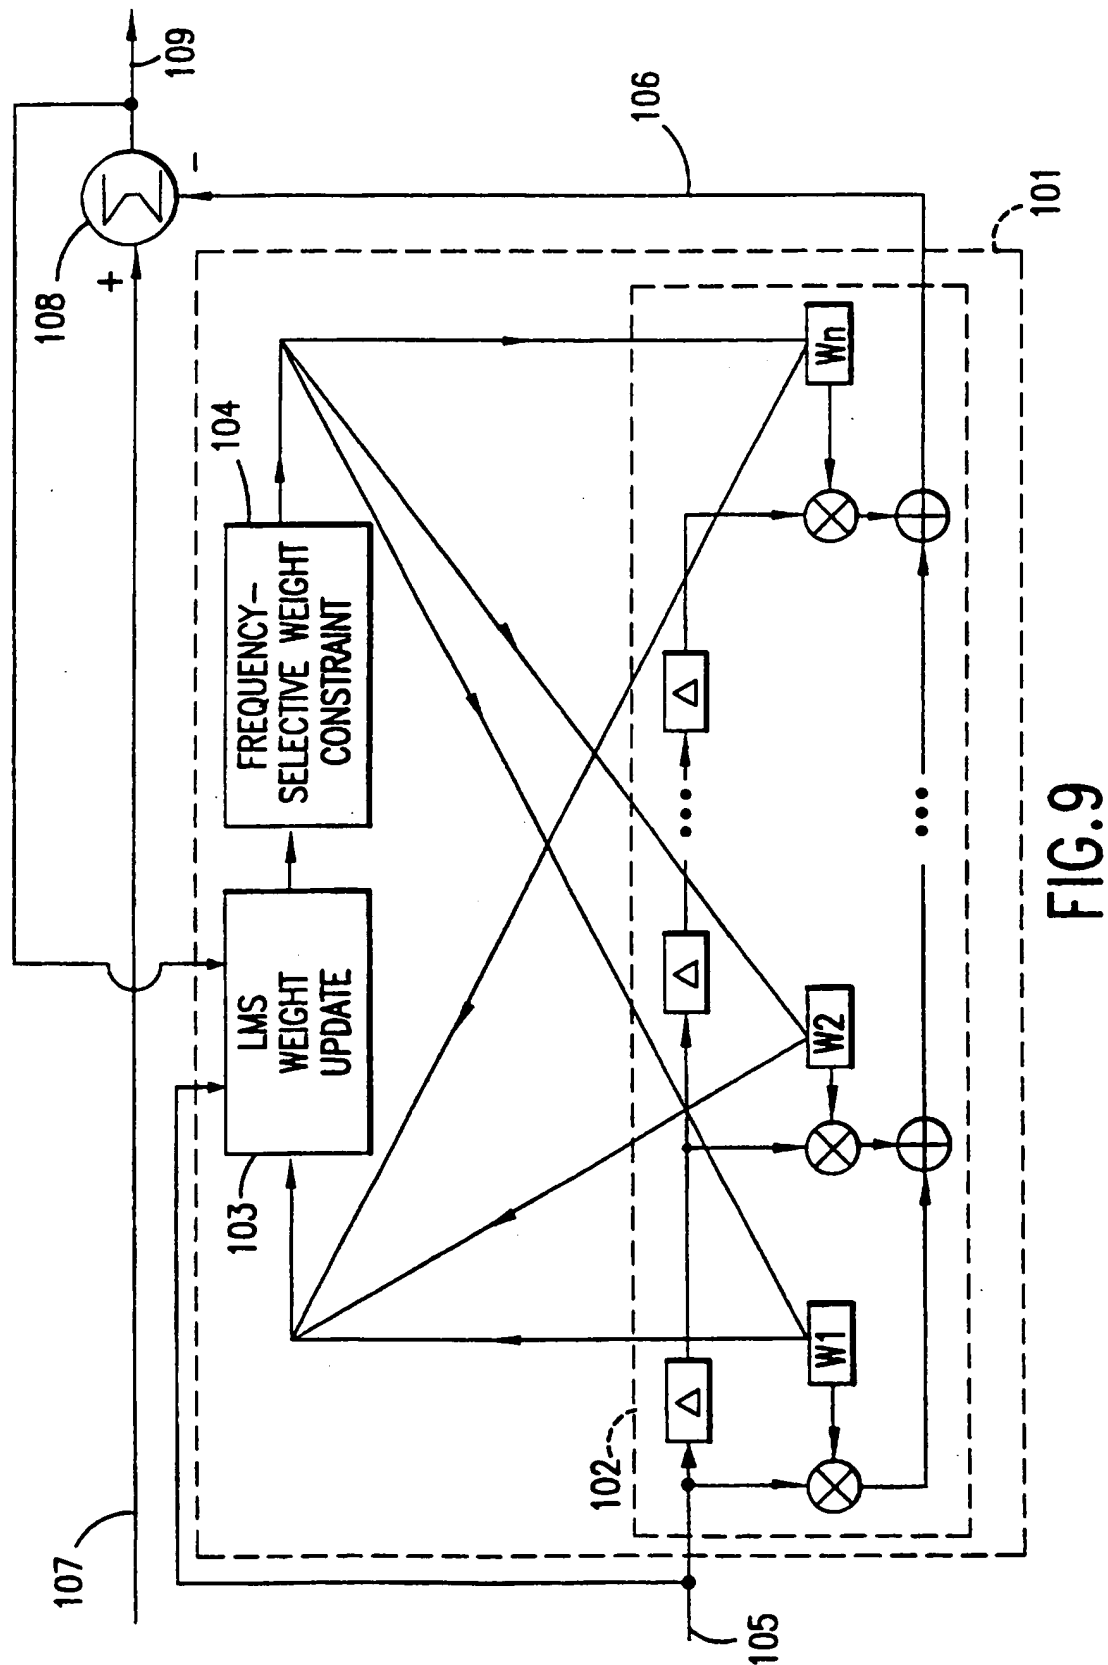


FIG. 9

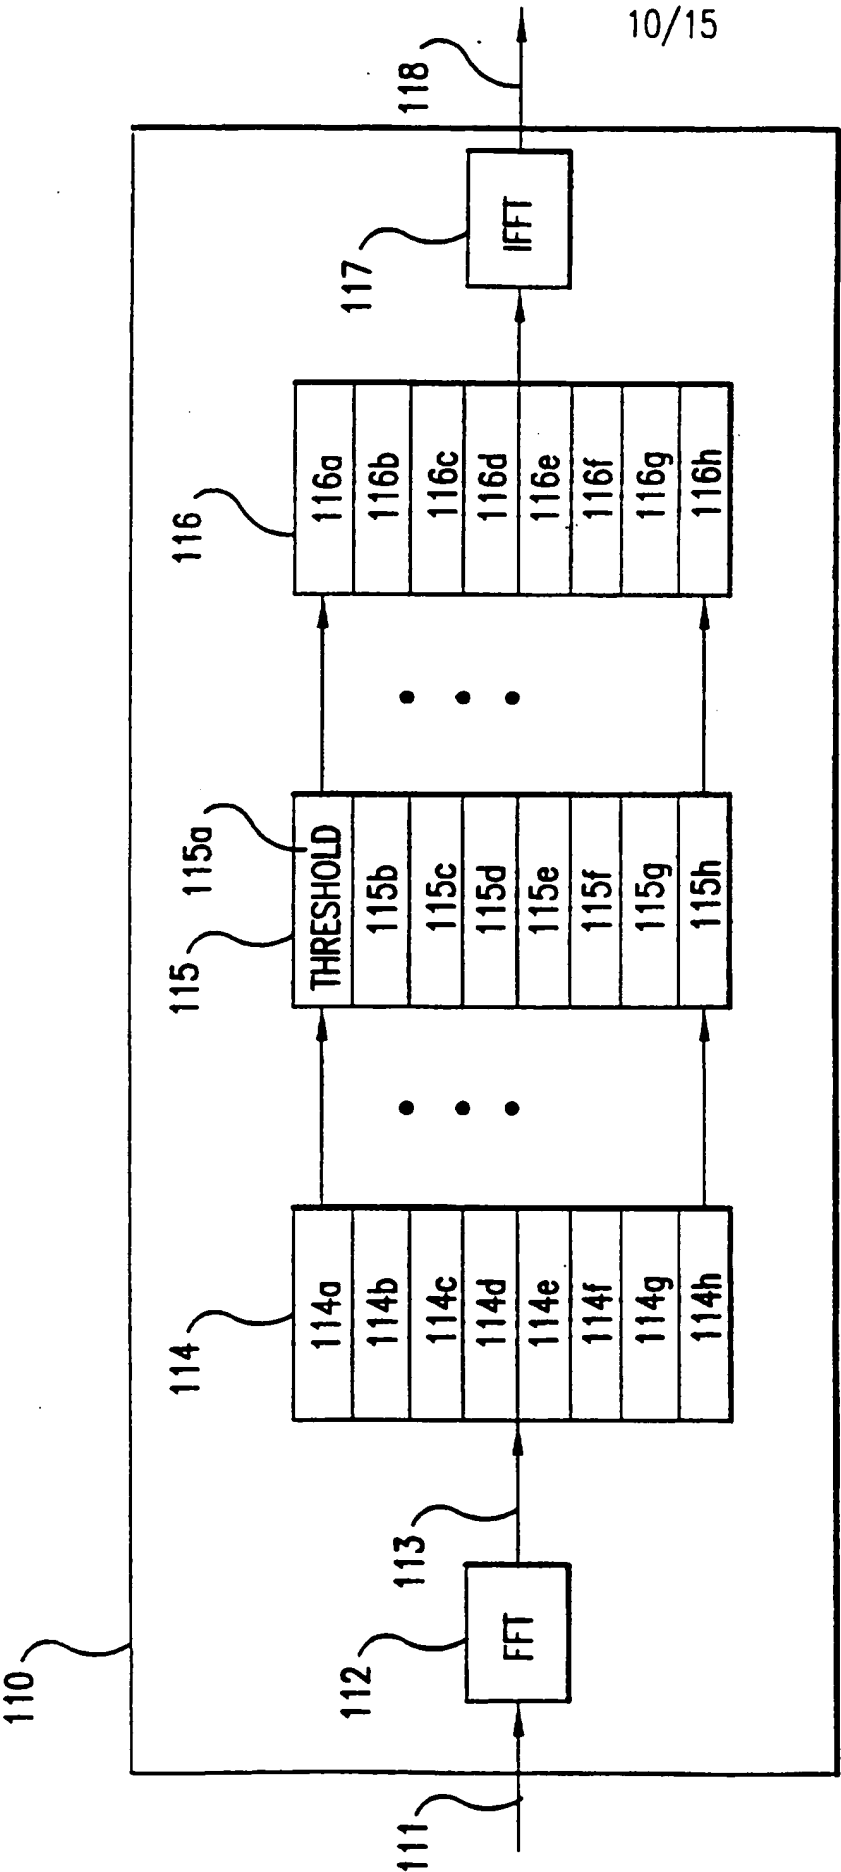


FIG.10

11/15

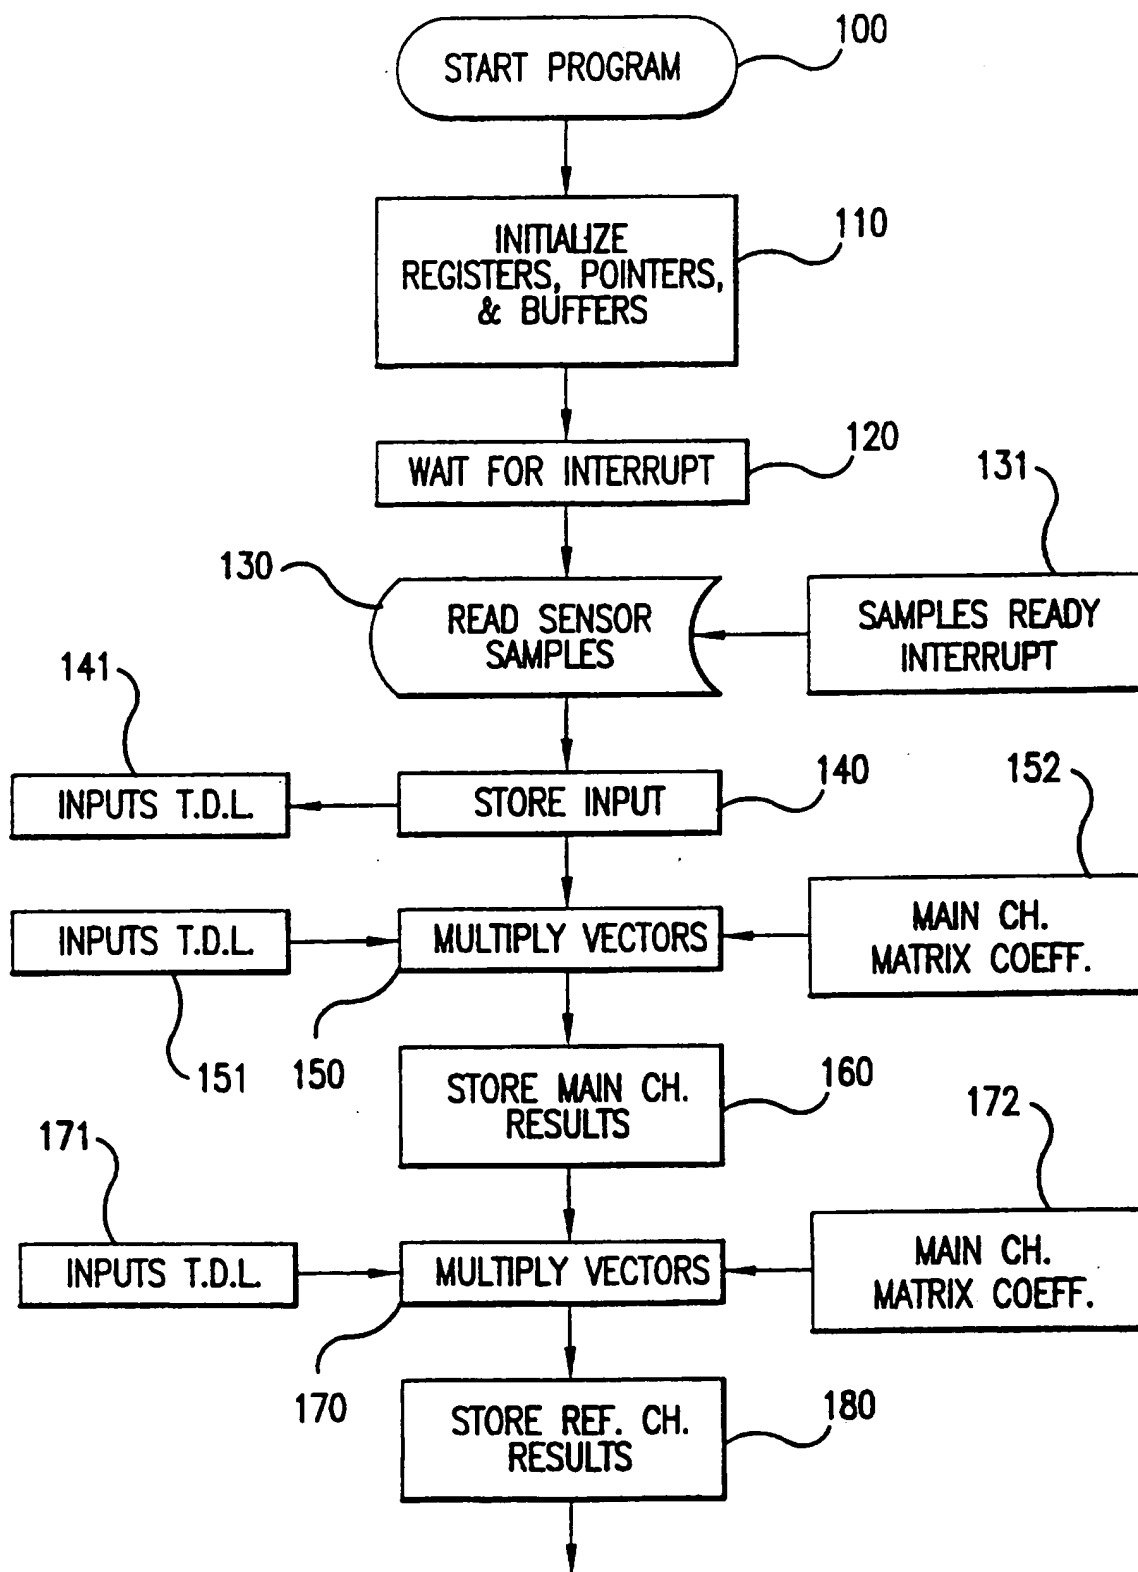


FIG.11A

12/15

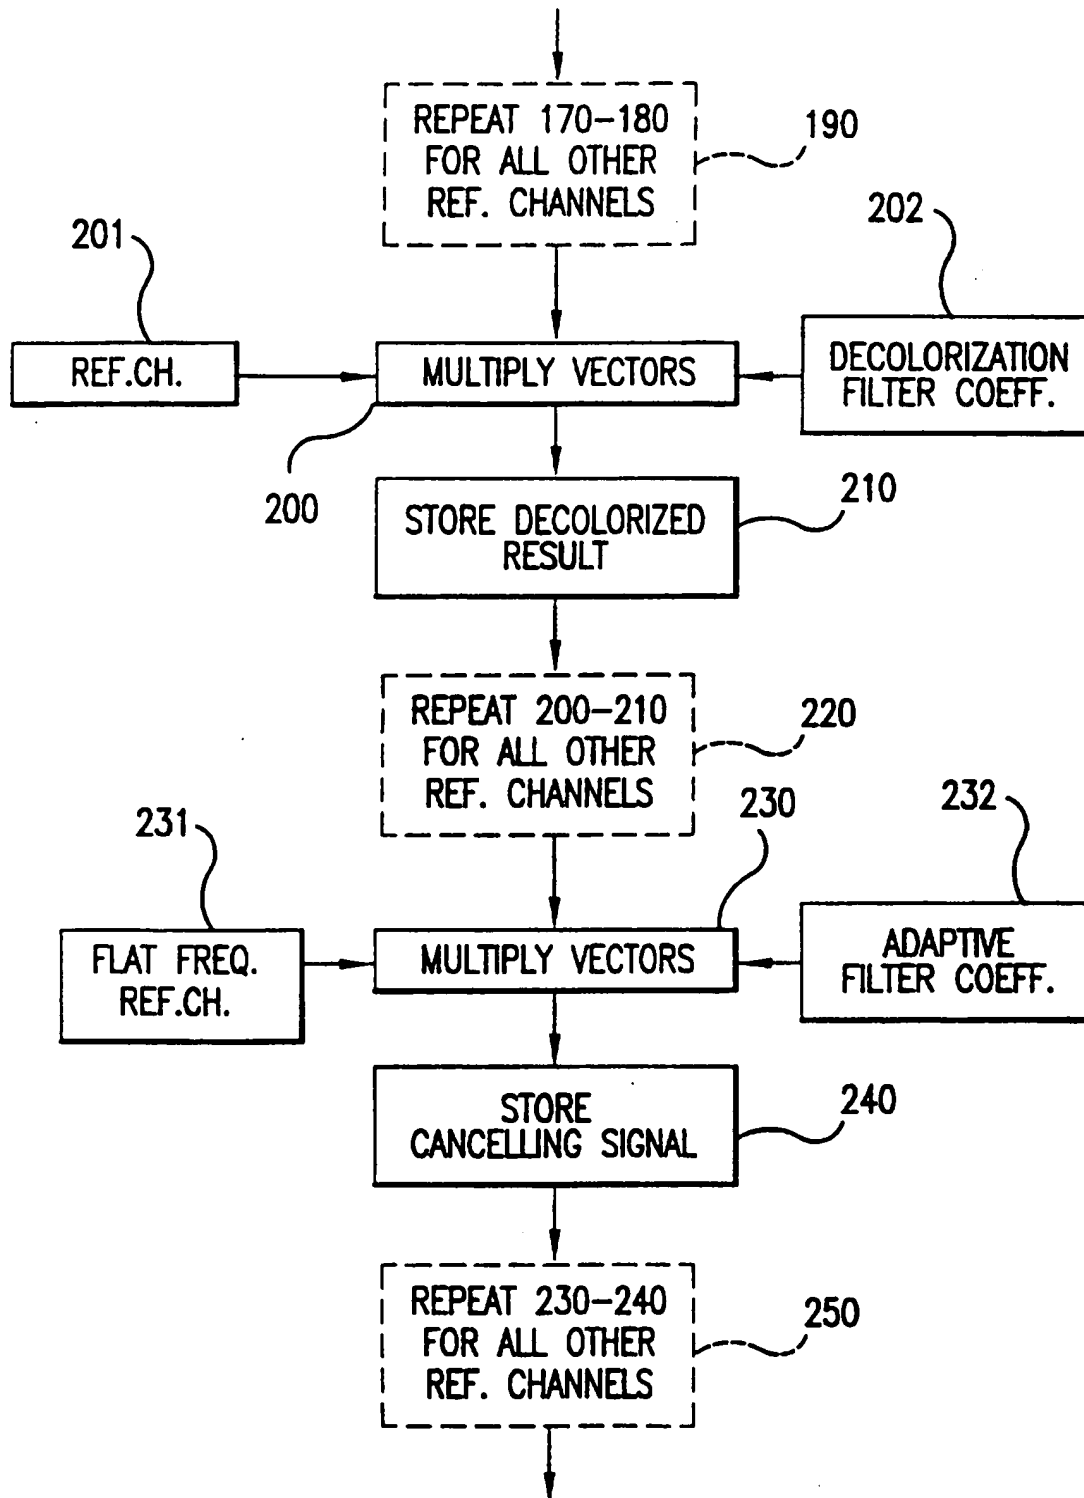


FIG.11B

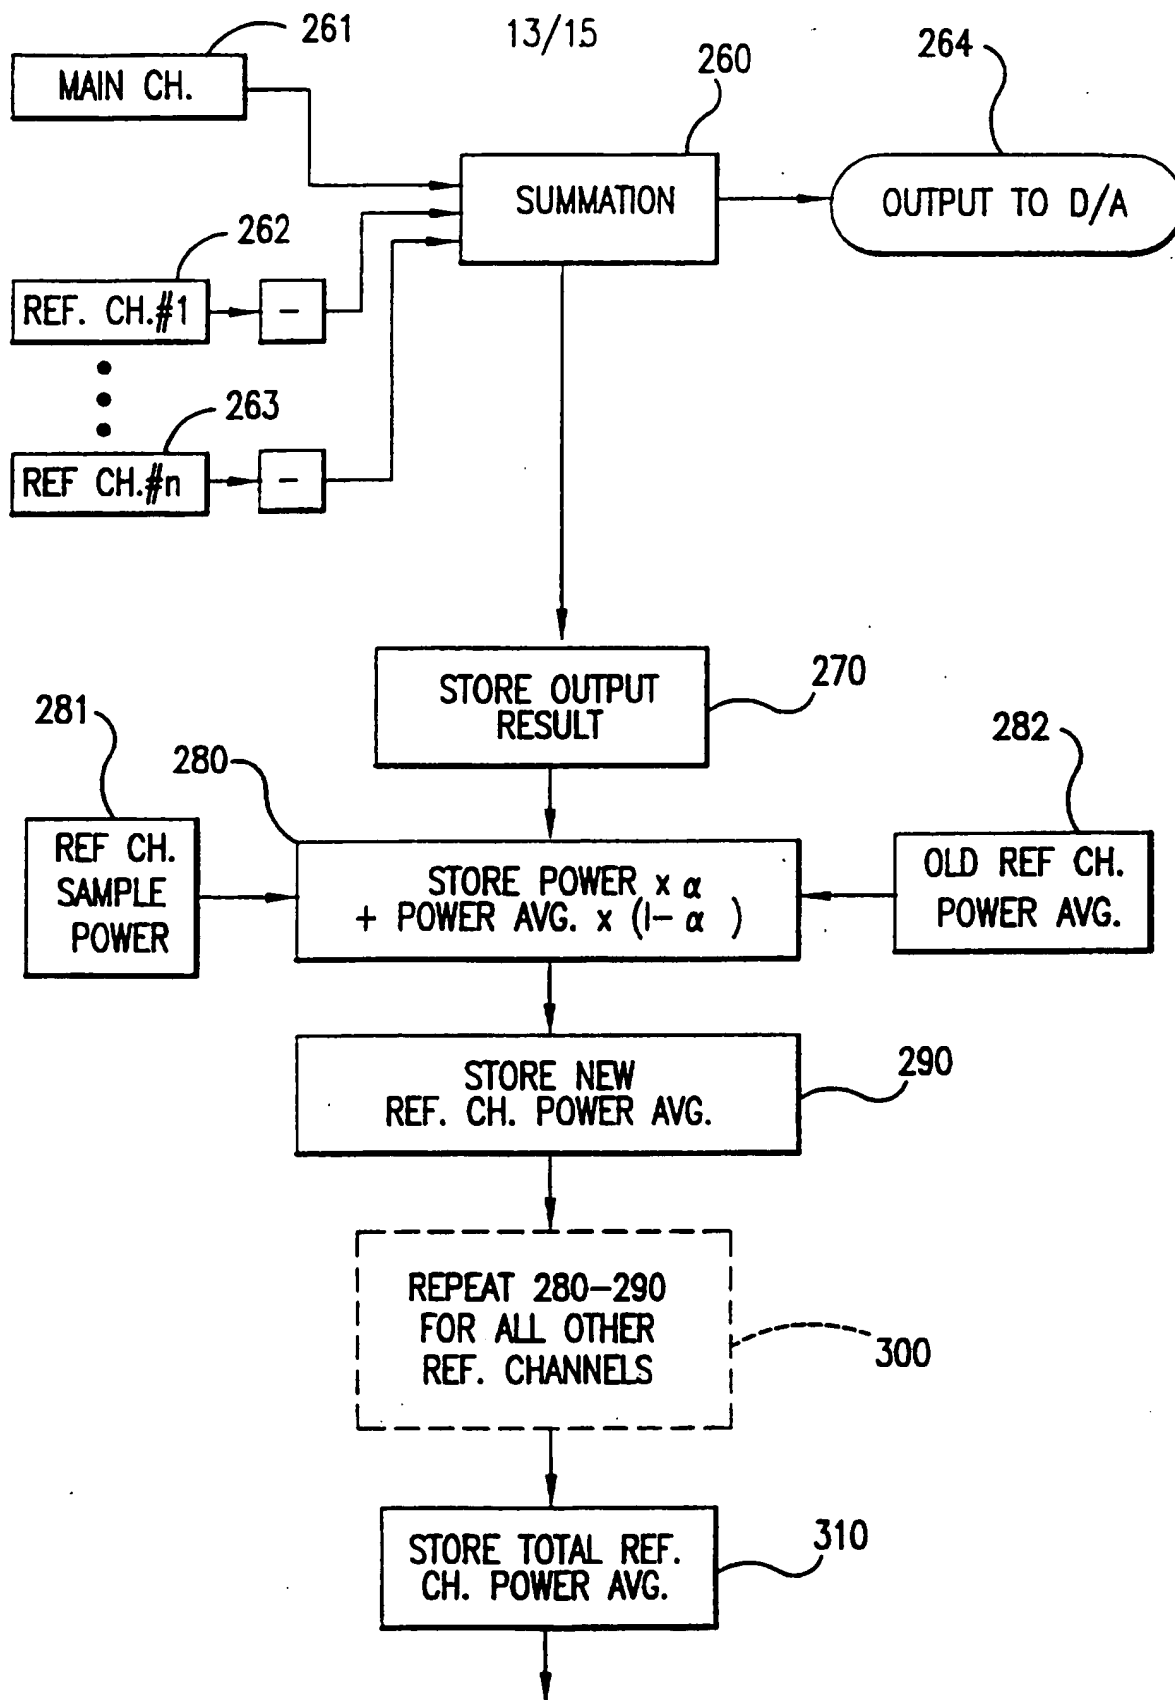


FIG.11C

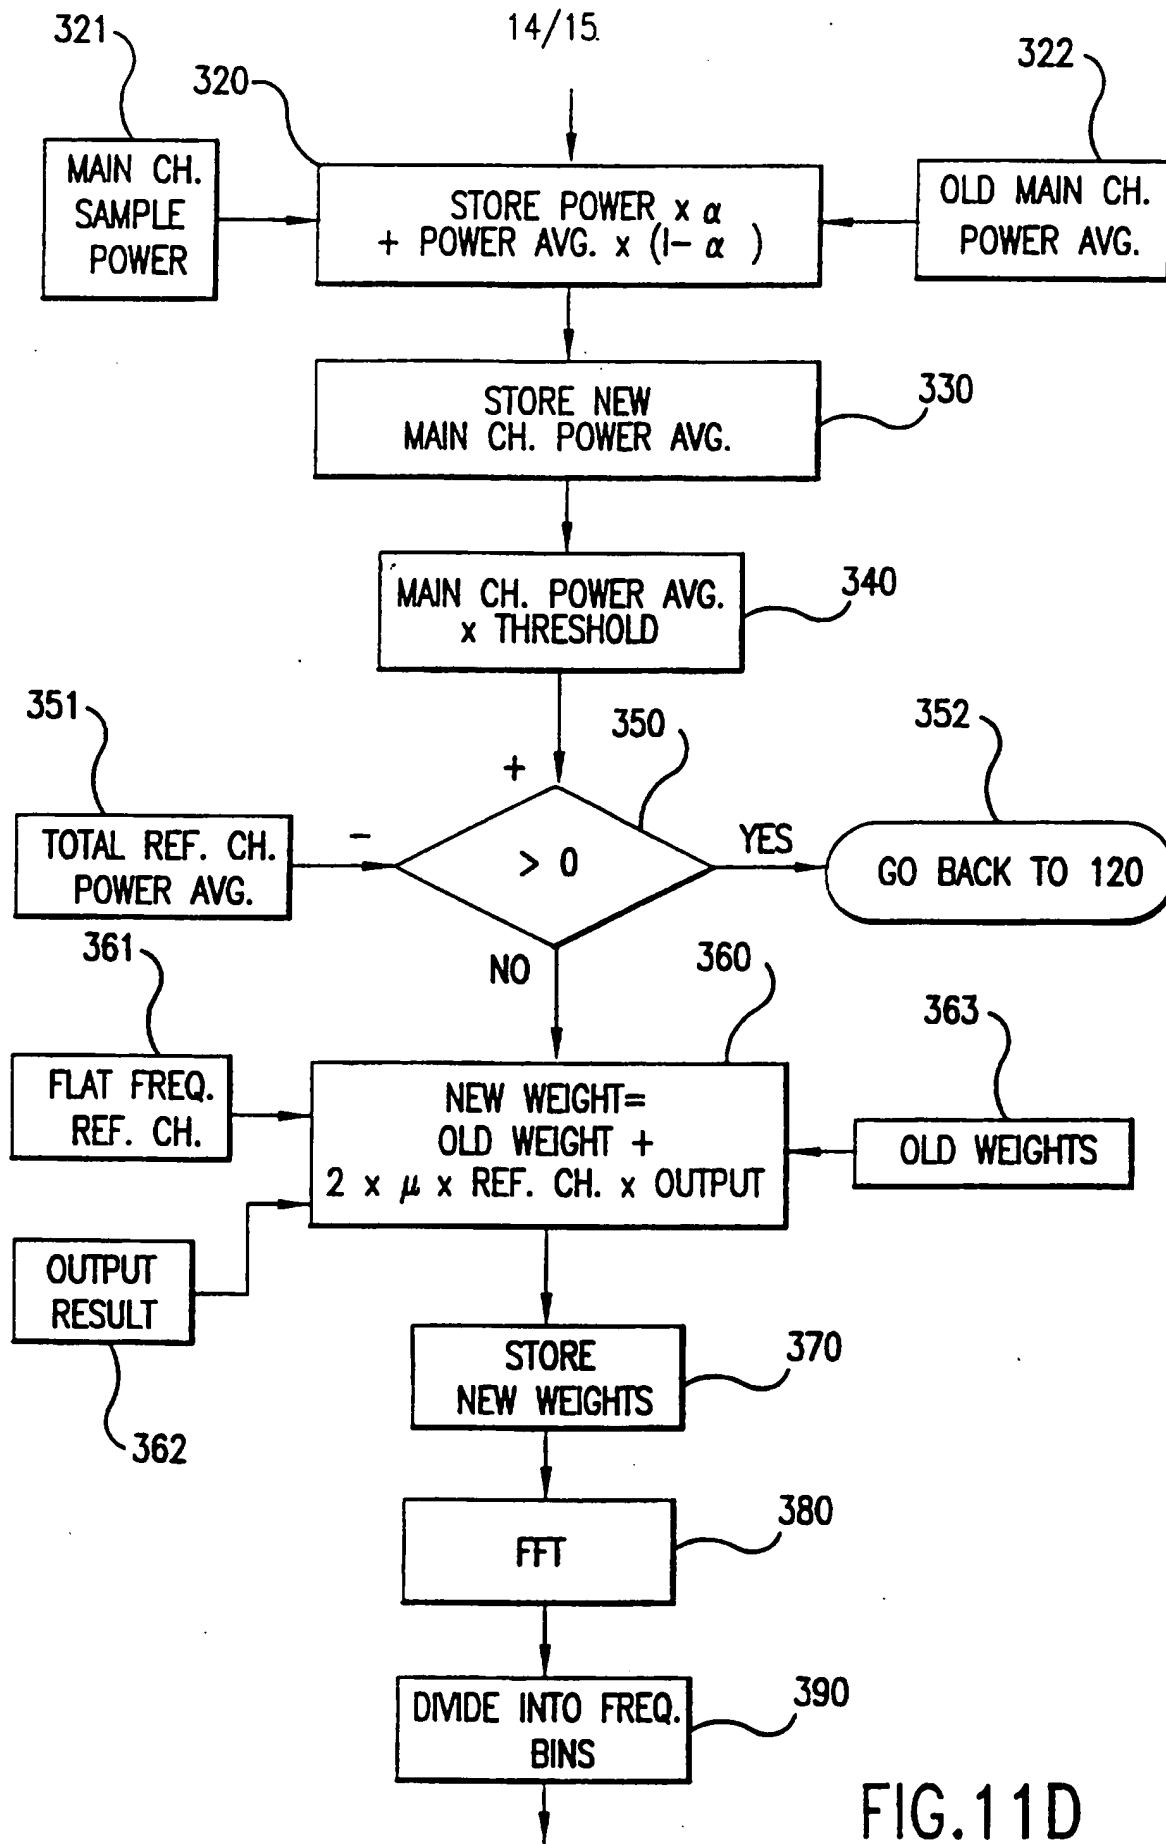


FIG.11D



15/15

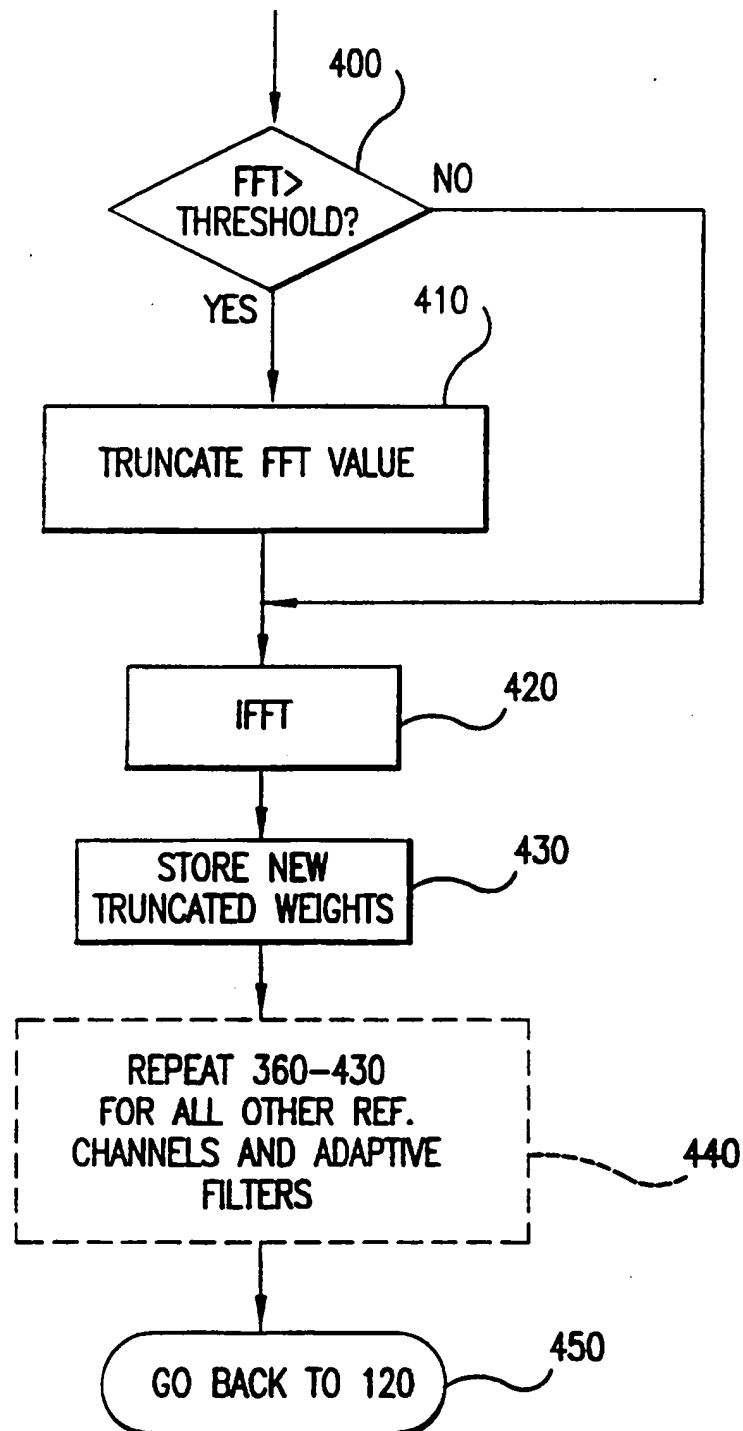


FIG. 11E

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

---

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**